Review and Evaluation of the Cave, Dry Lake, and Delamar Valleys Groundwater Model Developed by Myers (2011d)

PRESENTATION TO THE OFFICE OF THE NEVADA STATE ENGINEER


Prepared for



Prepared by



August 2011

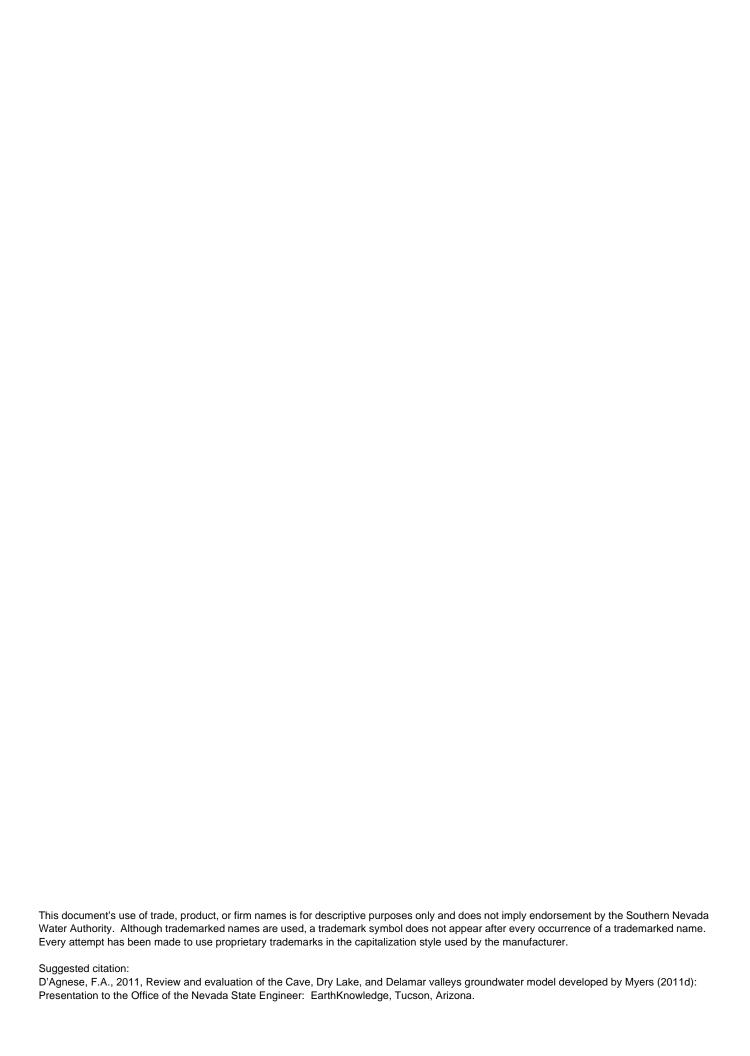

Review and Evaluation of the Cave, Dry Lake, and Delamar Valleys **Groundwater Model Developed by Myers (2011d)**

Submitted to: Jason King, P.E., State Engineer State of Nevada Department of Conservation & Natural Resources Division of Water Resources 901 S. Stewart Street, Suite 2002 Carson City, Nevada 89701

Pertaining to: Groundwater Applications 54003 through 54021 in Spring Valley and Groundwater Applications 53987 through 53992 in Cave, Dry Lake, and Delamar Valleys

August 2011

Prepared by: EarthKnowledge 500 N. Tucson Blvd Suite 150 Tucson, Arizona, 85716

Introduction

In his expert report, Myers (2011d) utilizes the Carbonate-Rock Province (CRP) ground-water models developed by the U.S. Geological Survey as part of the Great Basin Regional Aquifer Systems Assessment (RASA) program to conduct an effects analysis of the proposed SNWA water-right applications in Delamar, Dry Lake, and Cave valleys. The CRP models include the original steady-state model constructed and calibrated by Prudic et al. (1995) and the transient simulation conducted by Schaefer and Harrill (1995).

For clarity it is important to note that in the transient simulation, Schaefer and Harrill (1995) do not actually calibrate a transient model by changing model parameters such as transmissivity, to match time-variant water-level observations or groundwater discharge estimates. Instead, they assign storage-parameter values from existing literature available at the time of their investigation. Storage-parameter values are assigned based on the dominant type of hydrogeologic unit occurring in a model cell. The Schaefer and Harrill model has often been misinterpreted as being a calibrated transient groundwater flow model. It is not.

Myers (2011d, p. 42) correctly states early on in his effects analysis that the RASA model was developed to test broad concepts of regional groundwater flow in the Great Basin. He also cites Schaefer and Harrill in describing their transient simulation as being a first approximation. Unfortunately, he does not heed the warning of both sets of authors and proceeds to draw very detailed conclusions in his expert report interpreting some very specific and very local-scale results from his own use of these models.

Both sets of authors of the CRP models state in numerous places throughout their reports that the model is appropriate only "to present a *conceptual evaluation of ground-water flow* in the carbonate-rock province" (Prudic et al., 1995, page D5, column 2, paragraph 1, emphasis added). Also, they provide very clear reasons why the model is

"not suited to predict accurate water-level declines that would result from pumping ground water in the province," and that "the model is not suited to predict the accurate rate of change in natural discharge caused by pumping because the model has not been calibrated to any transient simulations" (Prudic et al., 1995, page D93, column 1, paragraph 4, emphasis added).

Unfortunately, these are exactly the type of predictions for which the CRP model is being used by Myers.

In fact, there are three basic limitations described or endorsed by both sets of CRP model authors that justify not using it to predict water-level declines or the rate of change in natural discharge. They include: (1) the very coarse discretization of the model; (2) the uncertainty in water budget



components of the model; and (3) the steady-state nature of the model. These limitations are described in detail below.

Very-Coarse Model Discretization

Prudic et al. (1995) specifically caution the readers of their report not to draw too many conclusions regarding detailed hydrogeology from their model. In fact, early in their report they state:

"Computer models are tools that can be used effectively to help understand complex ground-water flow systems. However, rarely are computer models used to simulate ground-water flow over such a large and geologically complex area as the carbonate-rock province. Endless arguments could be invoked as to the validity of the assumptions and hydrologic values used in simulating ground-water flow within the carbonate-rock province. For this reason, it must be stressed that the computer simulation discussed in this report is conceptual in nature. *Only broad concepts and large-scale features can be inferred from the results of this study.* Although a fairly detailed analysis of ground-water flow will be discussed, it does not intend to indicate that the study results presented here are adequate; in fact, the objective in presenting a detailed analysis of ground-water flow is to examine the possibility of the relatively shallow flow regions being interconnected by deep flow through carbonate rocks, and how regional geologic features might affect the direction of flow and water levels (Prudic et al., 1995; page D15, column 2, paragraph 1; emphasis added).

Further, they specifically address the issue of model discretization when discussing the assumption of homogeneity in model cells stating that "...the model grid used to simulate regional flow results in the averaging of hydraulic properties over 37.5-mi² areas. However, not enough information is available for the study area to substantiate the assumption" (Prudic et al., 1995; page D15, column 2, paragraph 2).

Ultimately, model discretization affects final estimated transmissivity values and the simulated water levels used in any predictions made with the model. Here again the authors caution the reader:

Locally, transmissivities could be changed an order of magnitude, and model results might still be reasonable with respect to areas of estimated water levels and quantities of simulated discharge. Large cell sizes and the generalization of transmissivities result in a more gradual change in simulated water levels than might be expected from abrupt lateral and vertical changes in geologic units observed in the study area. Where geologic structures are barriers to flow in south-central Nevada, water-level differences between adjacent valleys are as much as 2,000 ft (Winograd and Thordarson, 1975, p. 63). With cell sizes of 5 mi by 7.5 mi, the model tends to smooth such large differences (Prudic et al., 1995; page D38, column 2, paragraph 2).

And, further, they state that "errors in transmissivities are unknown, but the estimates could be off by a factor of 5 or more" (Prudic et al., 1995; page D38, column 2, paragraph 2).

The issue of model coarseness is also addressed by Prudic et al. (1995) in the section describing model calibration.

The model was deemed calibrated when simulated discharge approximated the mapped distribution and estimated discharge in each hydrographic area. In addition, computed water levels were matched as closely as practical with estimated values. For the best-fit simulation, 86 percent of the simulated water levels (666 out of 773 model cells) were within 250 ft of the estimated water levels for the upper layer and 76 percent (109 out of 144 cells) were within 250 ft for the lower layer.

The 250-ft criterion used for calibration purposes is only 3 percent of the total water-level difference in the model. The maximum simulated water level is more than 7,000 ft above sea level, along the eastern side of the model; in contrast, the minimum is below sea level, in Death Valley. Water-level differences between adjacent model cells commonly exceed 250 ft; in a few locations, they exceed 500 ft (Prudic et al., 1995; page D32, column 2, paragraphs 3 and 4, emphasis added).

Prudic et al. (1995) are stating through these two paragraphs that the required match of simulated water levels in the CRP model to observed water levels in the field is 250 ft. As long as the model-simulated water level was within 250 ft of the field-observed water level the model was considered accurate in that model cell.

Also, it is important to note that Myers does refine the grid resolution of the CRP model before conducting his simulations. However, this telescoping of the grid does nothing to improve the resulting calibration or accuracy of predictions. It merely provides added interpolation of the head calculations at each model node so that the resulting simulated potentiometric surface is smoother than in the original, published version of the model.

Water Budget Components

Prudic et al. (1995) also provide recommendations regarding appropriate model use when describing the various estimates for regional water budget components. They emphasize that:

Results from the model simulation are only approximate because uncertainties exist in the distribution and quantity of recharge and because water levels in the consolidated rocks are unknown over much of the area. Although discussed in detail, the model results are conceptual because actual values are not known for any of the variables in the ground-water flow equation. In particular, other, equally valid, distributions of transmissivity may be found that permit the model to be calibrated to the existing information (Prudic et al., 1995; page D38, column 1 paragraph 2).

They specifically target estimates of recharge to stress their point.



Errors in the estimates of recharge are unknown but locally could be well in excess of 100 percent. If recharge is increased in the model by 100 percent, a similar distribution of water levels could be simulated by proportionately increasing transmissivities and vertical leakances (Prudic et al., 1995; page D38, column 1 paragraph 5).

The issue of water budget and model error is also illustrated in Table 1 of Prudic et al. (1995) where the authors compare the simulated groundwater discharge to the estimated (or field-observed) groundwater discharge. In the table, it is clear that 15 out of the 22 simulated springs exceed 10 percent error with some springs being in as much as 50 percent in error (see Table 1).

These calibration errors should be considered and discussed with each prediction made from the model. Myers does not address this model error when presenting the results of his effects analysis. Specifically, Myers should describe his predictions of spring-flow reduction within in the context of the original model error so that the reader can consider the relevance of the Myers predictions.

Steady-State Assumption

Prudic et al. (1995) also describe the steady-state nature of their model with acute clarity. They caution the reader to understand the limitations of the model because of this basic assumption and provide several reasons why the model should not be used for predictive purposes. The most noteworthy and relevant to this proceeding include the following statements:

- Model simulations assume steady-state conditions prior to development, in which
 estimates of current recharge (1950-80) equal estimates of natural discharge prior
 to groundwater development. That is, the model does not include groundwater
 withdrawals. Whether current recharge equals natural discharge is unknown
 (Prudic et al., 1995; page D15, column 2, paragraph 3).
- Groundwater levels and spring discharge may not be in equilibrium with the present-day recharge because of the long distances between areas of recharge and discharge (Prudic et al., 1995; page D17, column 1, paragraph 1).
- Because estimates of hydraulic properties and the length of flow through the consolidated rocks are generally unknown, deeper flow through carbonate aquifers may not be in equilibrium throughout the province. If deeper flow is not in equilibrium, then present-day discharge may be responding to residual water levels related to recharge from previous wet periods, such as the last glacial epoch, and the analysis of flow presented herein may not represent actual flow everywhere (Prudic et al., 1995; page D17, column 1, paragraph 1).

Through these statements the authors are emphasizing that while the model may be good for conceptual evaluations at the scale of the Carbonate-Rock Province, it is not appropriate for use on a scale of an individual hydrographic area because in many basins throughout the Carbonate-Rock Province steady-state conditions do not exist and that this violation of the steady-state assumption has significant effects on simulated flow-paths, water-levels, and fluxes.

Table 1
Estimate Discharge of Regional Springs Compared with Simulated Discharge Following Model Calibration

| Regional Spring | Map No. | Discharge (acre-feet per year) | | Source of Discharge Estimate | Absolute Residual (afy) | cfs | % of Est. |
|---|-----------|-----------------------------------|---------|---|-------------------------------|------|--------------|
| | (fig. 11) | Estimated Simulated | | | | | |
| Manse Springs | 1 | 4,300 | 3,900 | Maxey and Jameson, 1948, p. 9-10 | 400 | 0.55 | 9% |
| Ash Meadows area (several springs) | 2 | 17,000 | 17,000 | Winograd and Thordarson, 1975, p. C78-C80 | 0 | 0.00 | 0% |
| Rogers and Blue Point Springs | 3 | 1,500 | 1,200 | Rush, 1968b, p. 39 | 300 | 0.41 | 20% |
| Muddy River Spring Area | 4 | 36,000 | 37,000 | Eakin, 1966, p. 264 | 1,000 | 1.38 | 3% |
| Grapevine and Stainigers Springs | 5 | 1,000 | 720 | Miller, 1977, table 4 | 280 | 0.39 | 28% |
| Pahranagat Valley (several springs) | 6 | 25,000 | 24,000 | Eakin, 1963, p. 20 | 1,000 | 1.38 | 4% |
| Panaca Warm spring | 7 | 7,900 | 9,900 | Rush, 1964, table 9 | 2,000 | 2.76 | 25% |
| Hot Creek Ranch Springs | 8 | 1,800 | 2,000 | Rush and Everett, 1966a, table 9 | 200 | 0.28 | 11% |
| Lockes (several springs) | 9 | 2,400 | 2,800 | Van Denburgh and Rush, 1974, p. 23, 50-52 | 400 | 0.55 | 17% |
| Blue Eagle and Tom Springs | 10 | 3,700 | 3,200 | Van Denburgh and Rush, 1974, p. 25, 50-51, Mifflin 1968, table 4 | 500 | 0.69 | 14% |
| Moon River and Hot Creek Springs | 11 | 13,000 | 13,000 | Maxey and Eakin, 1949, p. 37 | 0 | 0.00 | 0% |
| Mormon Hot Spring | 12 | 3,100 | 2,200 | Maxey and Eakin, 1949, p. 37 | 900 | 1.24 | 29% |
| Northern White River Valley (several springs) | 13 | 12,000 | 10,000 | Maxey and Eakin, 1949, p. 39 | 2,000 | 2.76 | 17% |
| Duckwater (Big and Little Warm Springs) | 14 | 11,000 | 13,000 | Van Denburgh and Rush, 1974, p. 23, 50-52 | 2,000 | 2.76 | 18% |
| Fish Creek Spring | 15 | 3,900 | 2,800 | Rush and Everett, 1966a table 9 | 1,100 | 1.52 | 28% |
| Twin Spring | 16 | 2,900 | 4,000 | Hood and Rush, 1965, table 9 | 1,100 | 1.52 | 38% |
| Campbell Ranch Spring | 17 | 7,700 | 7,400 | Eakin et al., 1967, table 4 | 300 | 0.41 | 4% |
| Shipley Hot Springs and Bailey Spring | 18 | 5,700 | 4,400 | Harrill, 1968, p. 31 | 1,300 | 1.79 | 23% |
| Fish Springs | 19 | 27,000 | 26,000 | Bolke and Sumsion, 1978, p. 10 | 1,000 | 1.38 | 4% |
| Nelson Springs (Currie Springs) | 20 | 2,200 | 1,800 | Eakin et al., 1967, table 4 | 400 | 0.55 | 18% |
| Blue Lake and Little Springs | 21 | 18,000 | 20,000 | Gates and Kruer, 1981, table 8 | 2,000 | 2.76 | 11% |
| Warm Springs | 22 | 3,300 | 5,000 | Eakin et al. 1951, p. 108 | 1,700 | 2.35 | 52% |
| Total discharge, all regional springs (rounded) | | 210,000 | 211,000 | | | | |

Source: From Prudic et al. (1995)



Ultimately, Prudic and his coauthors explicitly offer a recommendation on what the CRP model should, and should not be, used:

...the model greatly simplifies flow through a complex geologic region. Simulation results are based on assuming recharge to the province is known with the distribution of transmissivities simulated to match the general distribution of water levels and estimates of discharge. However, water levels in consolidated rocks are generally unknown, and estimates of recharge and discharge are known only approximately. Consequently, other, equally valid distributions of transmissivities may be found that permit the model to be calibrated to the existing water-level data and estimates of recharge and discharge. The model may be best suited for:

- Simulating alternative transmissivity distributions to evaluate potential source areas of regional springs,
- Simulating the effects of differing recharge rates on regional groundwater flow, and
- Simulating the effects of changing location of discharge on regional groundwater flow.

Therefore, the potential uses of the model are limited. The model is not suited to predict accurate water-level declines that would result from pumping ground water in the province. Also, the model is not suited to predict the accurate rate of change in natural discharge caused by pumping, because the model has not been calibrated to any transient simulations (Prudic et al., 1995; page D93, column 1, paragraph 2-4).

Additional Limitations from Transient Simulations

In their report, Schaefer and Harrill reiterate the basic assumptions and limitations presented by the original authors of the CRP model. They also emphasize that the model they are presenting is not a calibrated steady-state model and that any results of simulations presented should be regarded as generalizations.

Schaefer and Harrill also provide additional emphasis on the storage parameters that are used in the transient simulations. These storage parameters are assigned based on literature that was available at the time the simulations were conducted. They are not optimal storage parameter values that are derived from a transient calibration. Schaefer and Harrill describe the issue in the description of flow model assumptions. They state that...

...storage values used for transient simulations for the upper layer were based on the predominant aquifer material in each cell, determined from surficial maps. This distribution may not be totally correct because the material may be different at depth in the zone of saturation. Storage coefficients in the upper layer also assume dewatering of the sediments. Rock and deposit types were divided into three categories--basin-fill materials, carbonate rocks, and other consolidated rocks. Distribution of these units is shown by Prudic et al. (1993, fig. 15). Average values for storage coefficients in layer one were assigned to each of these materials.

For basin-fill material, a value of 0.1 was assigned on the basis of average values of specific yield used in U.S. Geological Survey reconnaissance evaluations of ground-water resources in most basins of the study area. For carbonate rocks, a value of 0.05 was assigned on the basis of an average porosity value of 0.047 determined from geophysical logs of five wells in the Coyote Spring Valley area (Berger, 1992, p. 18). For other rocks, a value of 0.01 was assigned on the basis of a range of values for fractured rocks given by Snow (1979, table 1) (Schaefer and Harrill, 1995; page 8, column 1, paragraph 2).

The storage values for both the basin-fill and carbonate aquifers are not well known, and *may cause the results of the model to vary significantly*. Changing the storage values of the upper layer by a range of +/- 50 percent, and changing the storage values of the lower layer to the two endpoints of 7.6E-5 and 1.2E-3, were assumed to give a reasonable test of how results might change. The model was rerun using these adjusted storage values... (Schaefer and Harrill, 1995; page 36, column 1, paragraph 2, emphasis added).

The sensitivity analysis conducted by Schaefer and Harrill actually demonstrates that predicted drawdown resulting from pumping can change anywhere from 1 foot to almost 100 ft in some areas. The sensitivity exercise actually provides additional insight into the importance of deriving storage parameter values though a transient calibration.

In fact, a review of other groundwater flow models in the Great Basin suggests that in many cases the storage parameters used by Schaefer and Harrill for the basin fill materials in their transient simulations and subsequent sensitivity analyses are actually rather conservative (see Table 2). These conservative storage parameter values ultimately have an impact on model predictions of this kind. In general, decreasing the storage parameters causes drawdown to get larger and evapotranspiration and spring flows to be captured more quickly. A more appropriate exercise by Myers would have used the full range of storage parameters, bracketing the simulation with a suite of storage parameters on the high-end and the low-end of the currently published Great Basin area models.

Finally, Schaefer and Harrill conclude that the "adequacy of the model in simulating the effects of the proposed pumping will remain untested until actual pumping stresses have been in place long enough to cause measurable effects within the system. This would allow for calibration of transient simulations that was not possible with the previous model (Schaefer and Harrill, 1995; page 42, column 2, paragraph 4).

Conclusion

Ultimately, the exercise conducted by Myers (2011d) is inappropriately misleading. It attempts to draw very detailed conclusions from a model that is inherently conceptual and was never intended to be and should never be used as a predictive model.



Table 2

| Great Basin Models | Author | Date | Material | Sp Y (min) | Sp Y (max) | |
|------------------------|-----------------------|------|------------|-----------------|------------|--|
| Pahrump Valley, NV-CA | Harrill | 1986 | Basin Fill | 0.10 | 0.25 | |
| Smith Creek Valley, NV | Thomas et al. | 1989 | Basin Fill | 0.06 | 0.15 | |
| Stagecoach Valley, NV | Harrill and Preissler | 1994 | Basin Fill | 0.05 | 0.30 | |
| Las Vegas Valley, NV | Morgan and Dettinger | 1996 | Basin Fill | 0.08 | 0.10 | |
| Carson Valley, NV | Maurer | 2002 | Basin Fill | 0.15 | 0.15 | |
| Milford area, UT | Mason | 1998 | Basin Fill | 0.15 | 0.15 | |
| DVRFS, NV-CA | Faunt et al. | 2004 | Basin Fill | Basin Fill 0.19 | | |
| CRP, NV-UT-CA | Schaefer and Harrill | 1995 | Basin Fill | 0.10 | 0.10 | |
| | | | Average | 0.11 | 0.18 | |

References

- Faunt, C.C., Blainey, J.B., Hill, M.C., D'Agnese, F.A., and O'Brien, G.M., 2004, Transient numerical model in Belcher, W.R., ed., Death Valley regional ground-water flow system, Nevada and California—Hydrogeologic framework and transient ground-water flow model: U.S. Geological Survey Scientific Investigations Report 2004–5205, Chapter F, p. 265–352.
- Harrill, J.R., 1986, Ground-water storage depletion in Pahrump Valley, Nevada-California, 1962-75: U.S. Geological Survey Water-Supply Paper 2279, 53 p.
- Harrill, J.R., and Preissler, A.M., 1994, Ground-water flow and simulated effects of development in Stagecoach Valley, a small, partly drained basin in Lyon and Storey Counties, western Nevada: U.S. Geological Survey Professional Paper 1409-H, 74 p.
- Mason, J.L., 1998, Ground-Water Hydrology and Simulated Effects of Development in the Milford Area, an Arid Basin in Southwestern Utah: U.S. Geological Survey Professional Paper 1409-G.
- Maurer, D.K., 2002, Ground-water flow and numerical simulation of recharge from streamflow infiltration near Pine Nut Creek, Douglas County, Nevada: U.S. Geological Survey Water-Resources Investigations Report 02–4145, 37 p.
- Morgan, D.S., and Dettinger, M.D., 1996, Ground-water conditions in Las Vegas Valley, Clark County, Nevada: Part 2, Hydrogeology and simulation of ground-water flow: U.S. Geological Survey Water-Supply Paper 2320-B, 126 p.
- Myers, T., 2011d, Hydrogeology of Cave, Dry Lake and Delamar Valleys impacts of pumping underground water right applications #53987 through 53092: Presentation to the Office of the Nevada State Engineer: Great Basin Water Network, Reno, Nevada, and the Federated Tribes of the Goshute Indians, Ibapah, Utah.
- Prudic, D.E., Harrill, J.R., and Burbey, T.J., 1995, Conceptual evaluation of regional ground-water flow in the carbonate-rock province of the Great Basin, Nevada, Utah, and adjacent states U.S. Geological Survey Professional Paper 1409-D, 102 p.
- Schaefer, D.H., and Harrill, J.R., 1995, Simulated effects of proposed ground-water pumping in 17 basins of east-central and southern Nevada: U.S. Geological Survey Water-Resources Investigations Report 95–4173, 71 p.
- Thomas, J.M., Carlton, S.M., and Hines, L.B., 1989, Ground-water flow and simulated response to selected developmental alternatives in Smith Creek Valley, a hydrologically closed basin in Lander County, Nevada: U.S. Geological Survey Professional Paper 1409-E, 57 p.