

LEGEND

- 69 PARADISE VALLEY
- 117 FISH LAKE VALLEY
- 129 BUENA VISTA VALLEY
- 137 BIG SMOKY VALLEY
- 138 GRASS VALLEY
- 153 DIAMOND VALLEY
- 156 HOT CREEK VALLEY
- 157 KAWICH VALLEY
- 161 INDIAN SPRING VALLEY
- 162 PAHRUMP VALLEY
- 170 PENOYER VALLEY
- 173 RAILROAD VALLEY
- 173A REVELLE VALLEY*
- 176 RUBY VALLEY
- 177 CLOVER VALLEY
- 184 SPRING VALLEY
- 186 ANTELOPE VALLEY
- 187 GOSHUTE VALLEY
- 188 INDEPENDENCE VALLEY
- 207 WHITE RIVER VALLEY
- 212 LAS VEGAS VALLEY

* subarea within Railroad Valley South
 SOURCE: Watson and others (1976)

EXPLANATION

- HYDROGRAPHIC-AREA BOUNDARY (Numbers correspond to those used by Hamill and others-1968).
- STATE BOUNDARY
- STUDY AREA BOUNDARY

MAP SHOWING LOCATION OF THE 21 BASINS USED IN DEVELOPING THE MAXEY-EAKIN METHOD

EVALUATION OF THE MAXEY-EAKIN METHOD FOR CALCULATING RECHARGE TO GROUND-WATER BASINS IN NEVADA 1992



COOPERATIVE WATER PROJECT
 Water for Nevada's Future
 Report No. 7

A. Worksheet for Screening Recharge Estimates

APPENDICES

| | | |
|----|--|-------|
| 1 | INTRODUCTION | 1 |
| 3 | GENERAL METHODS FOR ESTIMATING RECHARGE | 2.0 |
| 3 | DIRECT MEASUREMENT | 2.1 |
| 3 | GROUND-WATER BUDGET METHODS | 2.2 |
| 5 | GEOCHEMICAL MASS BALANCE METHODS | 2.3 |
| 5 | EMPIRICAL METHODS | 2.4 |
| 6 | MAXEY-EAKIN METHOD | 3.0 |
| 6 | DEFINITION | 3.1 |
| 9 | APPLICATION | 3.2 |
| 11 | APPROACH USED TO EVALUATE MAXEY-EAKIN METHOD | 4.0 |
| 11 | SCREENING OF MAXEY-EAKIN ESTIMATES | 4.1 |
| 13 | SCREENING OF WATER-BUDGET ESTIMATES | 4.2 |
| 17 | SCREENING OF MODEL ESTIMATES | 4.3 |
| 21 | DISCUSSION OF RESULTS | 5.0 |
| 22 | ANALYSIS OF UNCERTAINTY | 5.1 |
| 30 | COMPARISON TO PREVIOUS WORK | 5.2 |
| 30 | 5.2.1 Study by Watson and Others (1976) | 5.2.1 |
| 32 | 5.2.2 Study by Breckenkamp (1990) | 5.2.2 |
| 33 | EVALUATION OF UNCERTAINTY IN ESTIMATES FOR 20 BASINS | 6.0 |
| 35 | CONCLUSIONS | 7.0 |
| 37 | REFERENCES | 8.0 |
| 37 | 8.1 STATE OF NEVADA REPORT SERIES | 8.1 |
| 40 | 8.2 OTHER PUBLICATIONS | 8.2 |

PAGE

TABLE OF CONTENTS

| | | |
|----|---|---|
| 29 | Histogram of Residuals (Residual = Maxey-Eakin Estimate Minus Model Estimate), 27 Points | 9 |
| 28 | Histogram of Residuals (Residual = Maxey-Eakin Estimate Minus Water Budget Estimate), 40 Points | 8 |
| 24 | Scatter Diagram of Maxey-Eakin Estimates vs. Model Estimates, 27 Points | 7 |
| 23 | Scatter Diagram of Maxey-Eakin Estimates vs. Budget Estimates, 40 Points | 6 |
| 19 | Map Showing Location of Basins for the 27 Model Estimates | 5 |
| 16 | Map Showing Location of Basins for the 40 Budget Estimates | 4 |
| 10 | Generalized Water Budget for a Ground-Water Basin | 3 |
| 8 | Map Showing Location of the 21 Basins Used in Developing the Maxey-Eakin Method | 2 |
| 2 | Map Showing Location of the 20 Basins in Which the District Has Applied for Water Rights | 1 |

LIST OF FIGURES

| | | |
|----|---|---|
| 32 | Results of Multiple-Linear Regressions | 5 |
| 21 | Grouping of Recharge Estimates Identified by Screening Process | 4 |
| 18 | List of the 27 Model Estimates of Recharge | 3 |
| 15 | List of the 40 Water-Budget Estimates of Recharge | 2 |
| 7 | Precipitation Zones and Corresponding Coefficients for the Maxey-Eakin Method | 1 |

PAGE

LIST OF TABLES

COOPERATIVE WATER PROJECT SERIES

REFERENCES

Report
No.

1. Brothers, K., Tracy, J., Katzer, T., Stock, M. Bentley, C., Zdon, A., and Kepper, J., 1992, Hydrology and interactive computer modeling of ground and surface-water in the Lower Virgin River Valley, primarily in Clark County, Nevada: Las Vegas Valley Water District, Cooperative Water Project, Series Report No. 1, 90 p.
2. Woodward-Clyde Consultants, Darnes and Moore, and the Las Vegas Valley Water District, 1992, Environmental report of the Virgin River water resource development project, Clark County, Nevada: Las Vegas Valley Water District, Cooperative Water Project, Series Report No. 2, 130 p.
3. Bugo, T.S., Drici, Q., and Goings, D.B., 1992, Hydrology and steady state ground-water model of Coyote Spring Valley, Clark and Lincoln Counties, Nevada: Las Vegas Valley Water District, Cooperative Water Project, Series Report No. 3, 83 p.
4. Bugo, T.S., Drici, Q., and Goings, D.B., 1992, Hydrology and steady state ground-water model of Three Lakes South Valley, Clark County, Nevada: Las Vegas Valley Water District, Cooperative Water Project, Series Report No. 4, 80 p.
5. Cole, E., Cernoch, B., Bruce, L., and Rumbaugh, J.O. III, 1992, Hydrology and steady state ground-water model of Three Lakes North Valley, Clark and Lincoln Counties, Nevada: Las Vegas Valley Water District, Cooperative Water Project, Series Report No. 5, 45 p.
6. Cole, E., Cernoch, B., Bruce, L., and Rumbaugh, J.O. III, 1992, Hydrology and steady state ground-water model of Tikaboo Valleys North and South, Clark and Lincoln Counties, Nevada: Las Vegas Valley Water District, Cooperative Water Project, Series Report No. 6, 50 p.
7. Avon, L. and Durbin, T.J., 1992, Evaluation of the Maxey-Bakin Method for Calculating Recharge to Ground-Water Basins in Nevada: Las Vegas Valley Water District, Cooperative Water Project, Series Report No. 7, 44 p.

EXECUTIVE SUMMARY

In this study, an evaluation of the Maxey-Eakin method for calculating recharge to ground-water basins in Nevada was performed. The evaluation consisted of comparing Maxey-Eakin estimates with independent estimates of recharge, and analyzing the nature of the differences between the groups of estimates. In the comparison with the Maxey-Eakin estimates, two different groups of independent estimates were used: (1) 40 recharge estimates that were identified from water budgets contained in reports by the State of Nevada, and (2) 27 recharge estimates that were identified from previous studies that used models.

The results of the comparisons indicate generally good agreement between the Maxey-Eakin estimates and both groups of independent estimates. To quantify this agreement, an analysis was conducted to estimate the uncertainty in the Maxey-Eakin method. The analysis produced an upper bound on the standard deviation of the Maxey-Eakin estimate for a given basin. For the group of 40 water-budget estimates, the upper bound on the standard deviation for an individual basin is 4,800 acre-ft/yr, and the corresponding coefficient of variation of the Maxey-Eakin estimate is no greater than 44 percent. For the group of 27 model estimates, the upper bound on the standard deviation is 4,300 acre-ft/yr, and the corresponding coefficient of variation is no greater than 25 percent.

A similar analysis of uncertainty was performed for 20 basins in which the District is applying for the appropriation of ground water. This analysis showed that, for a total Maxey-Eakin recharge estimate of 224,000 acre-ft/yr, an upper bound on the standard deviation of this estimate is 21,500 acre-ft/yr. The corresponding coefficient of variation of the total Maxey-Eakin estimate is no greater than 10 percent, which as expected illustrates that the uncertainty in the Maxey-Eakin method decreases as more basins are included in the computation.

The conclusion from this study, that the Maxey-Eakin method is a fairly reliable predictor, is in contrast to previous work by Watson and others (1976). Watson and others (1976) performed multiple-linear regressions to determine the individual Maxey-Eakin coefficients based on using water-budget discharges as the dependent variables. The Maxey-Eakin method was then judged based on the confidence interval associated with each individual Maxey-Eakin coefficient computed by regression. It is argued here that this statistical approach is not appropriate for evaluating the predictive reliability of the Maxey-Eakin method.

1.0 INTRODUCTION

This report presents an evaluation of the Maxey-Eakin method for calculating recharge to ground-water basins in Nevada. The Maxey-Eakin method, developed between 1947 and 1951, has been the primary method of recharge estimation used by the State of Nevada in its reconnaissance studies of ground-water resources. The method consists of an empirically-derived relationship between precipitation and recharge to a ground-water basin.

The primary objective of this study was to evaluate the Maxey-Eakin method by comparing Maxey-Eakin recharge estimates to ground-water discharge estimates that were independently derived using other methods. Several steps were necessary to accomplish this. First, Maxey-Eakin estimates for ground-water basins in Nevada were identified from two series of reports by the State of Nevada, Department of Conservation and Natural Resources: the Ground-Water Resources Reconnaissance Series and the Water-Resources Bulletins. Second, independent estimates of discharge or recharge for the same basins were identified wherever possible. Sources for these estimates included the state reports, publications of the U.S. Geological Survey, university publications, and journal articles. Criteria were developed in order to screen the data set for rejection of unsuitable estimates. Finally, the pairs of estimates were statistically evaluated to characterize the nature of the differences between the Maxey-Eakin recharge estimates and the independent estimates.


A second objective of the work was to evaluate the uncertainty in the Maxey-Eakin recharge estimates reported for 20 basins in eastern and southern Nevada. This set of valleys is of interest because the Las Vegas Valley Water District (District) filed for the appropriation of ground water and, in one case, surface water in these basins. The locations of these basins are shown in Figure 1.

The approach taken in this study has some similarities with an evaluation of the Maxey-Eakin method performed by Watson and others (1976). A similar screening procedure was used to identify suitable estimates of recharge. However, there are some significant differences in the

| | |
|-----------------|---------------|
| JOB NO. HCI-573 | DATE: 9-04-92 |
| BY: LA | DRAWN: DDG |
| CHKD: | REV: |

MAP SHOWING LOCATION OF THE 20 BASINS IN WHICH THE DISTRICT HAS APPLIED FOR WATER RIGHTS

FIGURE 1

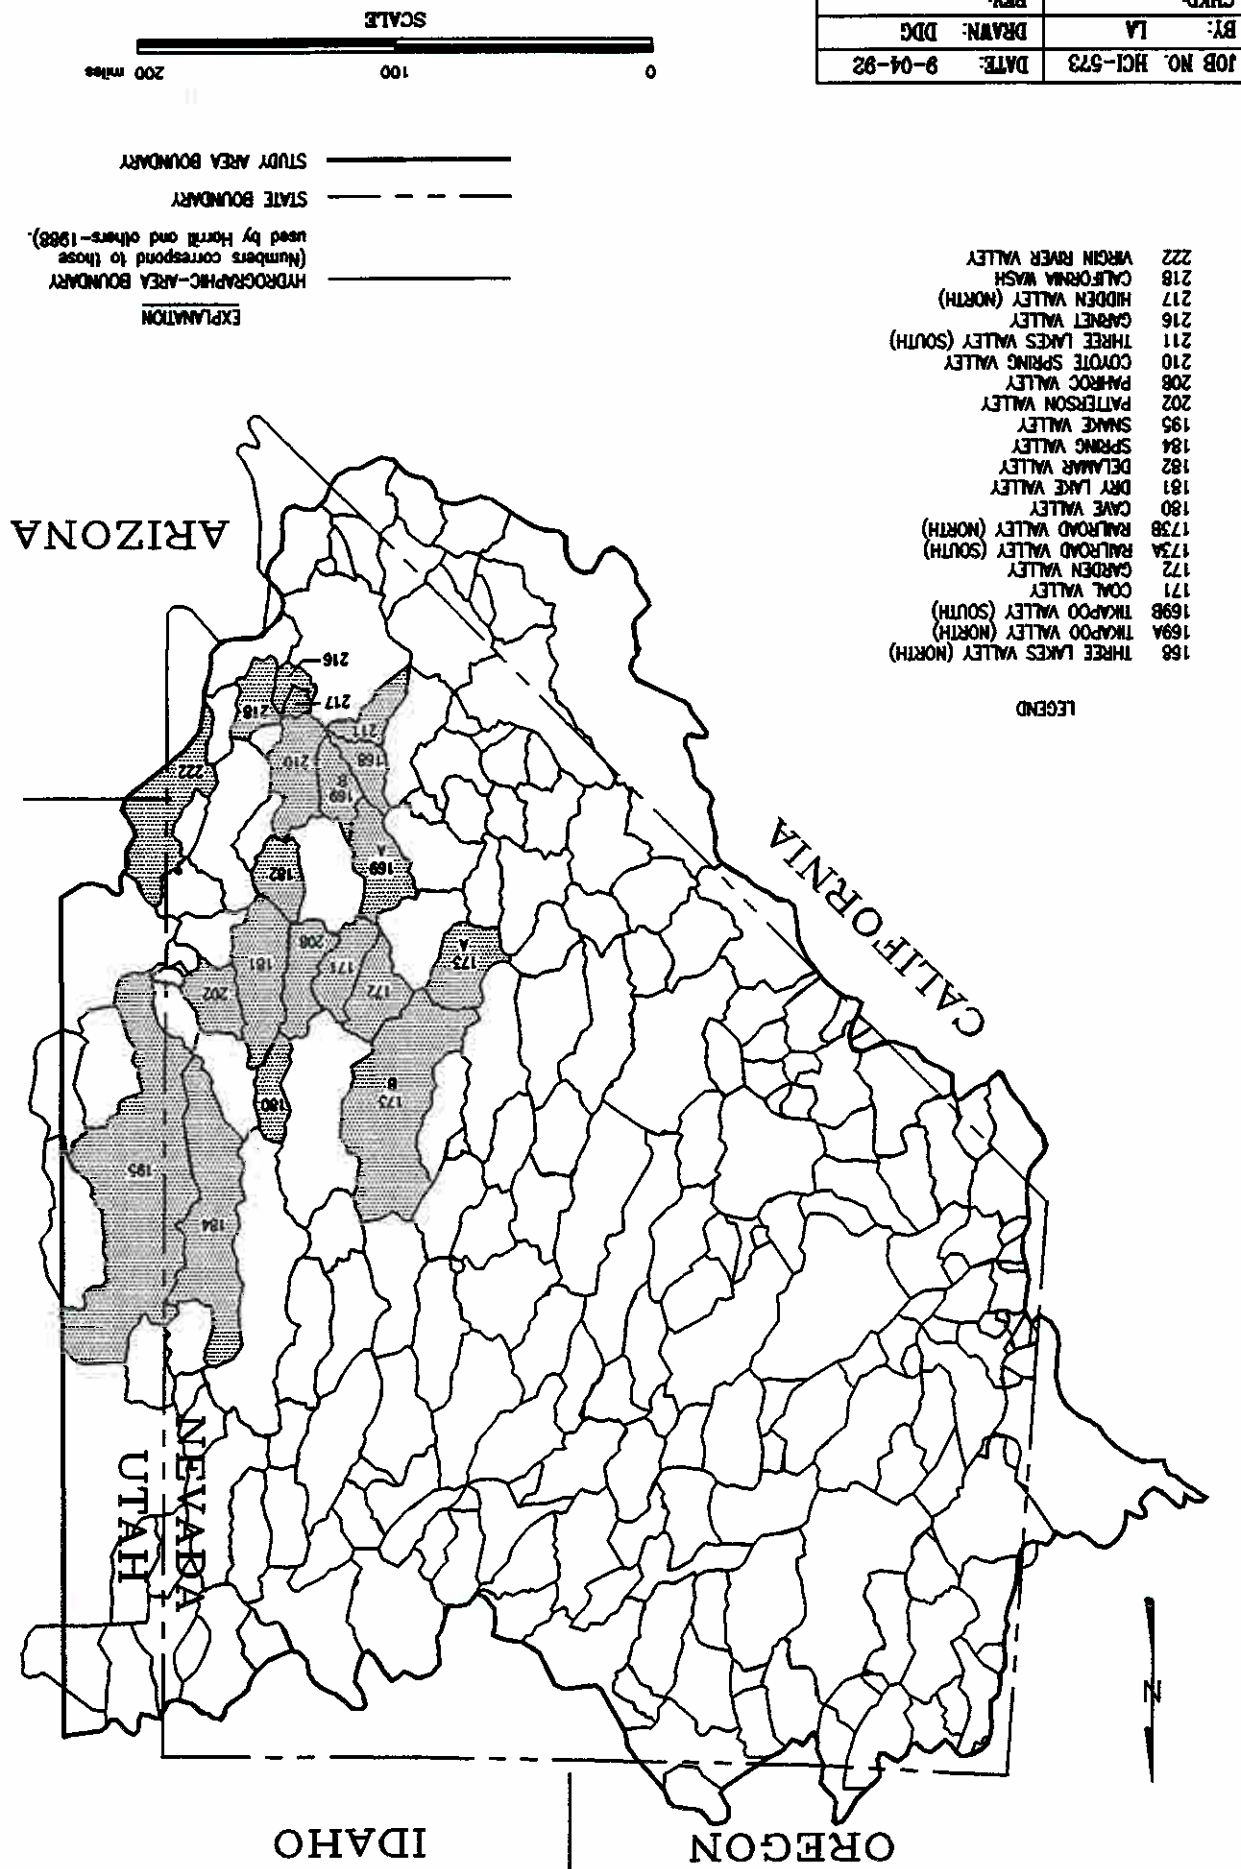

EXPLANATION

————— HYDROGRAPHIC-AREA BOUNDARY
(Numbers correspond to those used by Horrell and others—1988).

- - - - - STATE BOUNDARY

————— STUDY AREA BOUNDARY



- LEGEND**
- 166 THREE LAKES VALLEY (NORTH)
 - 169A THRAPPOD VALLEY (NORTH)
 - 169B THRAPPOD VALLEY (SOUTH)
 - 171 COAL VALLEY
 - 172 GARDEN VALLEY
 - 173A RAILROAD VALLEY (SOUTH)
 - 173B RAILROAD VALLEY (NORTH)
 - 177 GARDEN VALLEY
 - 180 CAVE VALLEY
 - 181 DRY LAKE VALLEY
 - 182 DELMAR VALLEY
 - 184 SPRING VALLEY
 - 185 SNAKE VALLEY
 - 202 PATTERSON VALLEY
 - 208 PAHROG VALLEY
 - 210 COYOTE SPRING VALLEY
 - 211 THREE LAKES VALLEY (SOUTH)
 - 216 GARNET VALLEY
 - 217 HIDDEN VALLEY (NORTH)
 - 218 CALIFORNIA WASH
 - 219 VIRGIN RIVER VALLEY
 - 222
 - 223

ARIZONA

CALIFORNIA

NEVADA
UTAH

IDAHO

OREGON



$$ET = \text{evapotranspiration from ground water,}$$

$$R = \text{ground-water recharge,}$$

where

$$(1) \quad R = Q_{out} - Q_{in} + ET + \Delta S$$

A general water budget for any ground-water basin can be defined as follows:

2.2 GROUND-WATER BUDGET METHODS

The only direct way to measure recharge flux is by using lysimeters installed into the vadose soil zone. The lysimeters actually measure the change in water content at various depths within the soil zone. These data, along with an estimate of vertical permeability, are used to calculate the recharge to the soil block. Lerner and others (1990) note that lysimeters are better suited to humid rather than semi-arid climates. In arid and semi-arid regions, precipitation tends to be highly variable, and thus a long period of measurement is necessary to estimate average recharge. Furthermore, uncertainty in the recharge estimate occurs due to uncertainty in the assumed permeability value.

2.1 DIRECT MEASUREMENT

Several authors have provided comprehensive reviews of the various methods for estimating ground-water recharge (Lerner and others, 1990; Simmers, 1988; Wilson and others, 1980). A brief review is given in Watson and others (1976). Following is a summary of the principal methods for estimating recharge.

2.0 GENERAL METHODS FOR ESTIMATING RECHARGE

two analyses. In this study nearly 20 years later, a broader literature survey was conducted and more recent recharge estimates were included, resulting in a different and more comprehensive data base. In addition, different techniques of statistical analysis were used, resulting in conclusions that are different from those in the earlier evaluation.

Changes in ground-water storage can be estimated from water-level fluctuations measured in wells. Water-level data are used with an estimate of the storage coefficient to calculate the change in the volume of storage. However, in developing a water budget, it is frequently assumed that the basin is in hydrologic equilibrium so that total recharge is equal to total discharge, and there is no change in storage.

Ground-water inflow or outflow is often estimated using Darcy's Law in a form commonly known as the TTW method, where the ground-water flux is calculated from the product of the transmissivity (T), the horizontal hydraulic gradient (I), and the cross-sectional width (W) through which flow occurs. Values for T and I are often assumed where no data are available.

Evapotranspiration (ET) is estimated by mapping areas of phreatophytes and playas from which ground water evaporates, applying an accepted use rate, and calculating consumption of ground water. In the Great Basin region, ET is usually a large component of the total discharge. Accordingly, this technique for estimating ET has been widely used in developing water budgets for basins within Nevada.

Water-budget methods for estimating ground-water recharge can be broadly defined as all methods that estimate the components of the water budget on the right side of Equation 1. Determination of all the components of the water budget requires the collection of a large amount of data. In practice, various terms of the budget are estimated, and the uncertainty these terms produces uncertainty in the recharge estimate. The various terms of the water budget are commonly estimated as follows:

$$\begin{aligned}
 Q_{IN} &= \text{ground-water inflow into basin,} \\
 Q_{OUT} &= \text{ground-water outflow from basin, and} \\
 \Delta S &= \text{change in ground-water storage within the basin.}
 \end{aligned}$$

Empirical methods involve developing a correlation between recharge and other variables such as precipitation, elevation, or temperature. Such relationships are derived from the study of a basin or group of basins, and then applied to estimate recharge in other basins that are assumed

2.4 EMPIRICAL METHODS

Chemical mass balance methods have been widely used for recharge estimation in arid and semi-arid areas (Lerner and others, 1990). Dettinger (1989) provides a discussion of the assumptions underlying the chemical-balance method and describes some potential sources of error.

Estimates of recharge to ground water can be obtained using environmental tracers such as chloride, deuterium, tritium, or oxygen-18. A mass balance principal is used to compare the total quantity of tracer input from precipitation in recharge areas to tracer concentrations in the ground water. Application of this basic technique to basins in Nevada has been performed by Dettinger (1989) using chloride, and by Kirk and Campana (1990) using deuterium.

2.3 GEOCHEMICAL MASS BALANCE METHODS

Mathematical models of soil-moisture infiltration may also be used to estimate ground-water recharge. This type of analysis can also be considered a water-budget method, since the models produce a soil-moisture balance. Such models may vary in the degree to which they simulate physical infiltration processes in the unsaturated zone. Water-budget type models partition precipitation at the land surface into evapotranspiration, runoff, recharge, and change in storage using simplified representations of physical processes. More sophisticated models simulate the infiltration of soil moisture using Richard's equation for unsaturated flow (Freeze and Cherry, 1979).

Numerical ground-water flow models have been used to estimate ground-water recharge or to refine earlier estimates of recharge. This type of analysis can be considered a water-budget method, since the models produce a balance of ground-water inflows with outflows and change in ground-water storage.

Watson and others (1976) review the development of the Maxey-Eakin method. In Water-Resources Bulletin 8 (1949), Maxey and Eakin delineate the precipitation zones used in the method, based on a map of precipitation in Nevada by Hardman (1936). According to Water-

The Maxey-Eakin method for estimating recharge to a ground-water basin was developed by G. B. Maxey and T. E. Eakin between 1947 and 1951 and has been applied to over 200 basins in Nevada and also in other western states. In brief, the Maxey-Eakin method consists of (1) estimating the mean annual volumes of precipitation within several precipitation zones for the drainage basin, (2) scaling these volumes by a factor representing losses from evapotranspiration and surface-water runoff that does not become ground-water recharge, and (3) summing the resulting recharge volumes to obtain an estimate of total recharge to the ground-water basin.

3.1 DEFINITION

3.0 MAXEY-EAKIN METHOD

recharge.

The remainder of this report will focus on one type of empirical method, the Maxey-Eakin method. This method consists of an empirical relationship between precipitation and recharge, which has been applied throughout Nevada. In accordance with conclusions reached by Lerner and others (1990), this report compares Maxey-Eakin estimates to independent estimates of importance of verifying the accuracy of the method by checking against independent estimates.

that once developed, they are easy to use. However, Lerner and others (1990) stress the or may include dependence on other factors. An advantage of such empirical relationships is include a threshold value for precipitation, below which there is no recharge, may be non-linear, where the function f will depend on terrain and climate. More complex relationships may

(2)

$$R = f(P)$$

R is a proportion of precipitation P (Lerner and others, 1990):

to have similar characteristics. The simplest form of an empirical relationship assumes recharge

References: Water Resources Bulletin No. 8 (Maxey and Eakin, 1949), p.40. Water Resources Bulletin No. 12 (Eakin and others, 1951), p. 80-81.

| Precipitation Zone | Maxey-Eakin Coefficient (%) |
|--------------------|-----------------------------|
| > 20 in. | 25 |
| 15-20 in. | 15 |
| 12-15 in. | 7 |
| 8-12 in. | 3 |
| < 8 in. | 0 |

**TABLE 1
PRECIPITATION ZONES AND CORRESPONDING COEFFICIENTS
FOR THE MAXEY-EAKIN METHOD**

where

ME = Maxey-Eakin recharge for a basin,

P_i = volume of precipitation within each of the five Hardman zones, and

a_i = recharge coefficient for each of the five Hardman zones.

$$ME = \sum_{i=1}^5 a_i P_i \quad (3)$$

Resources Bulletin 8, discharge data for 13 valleys in east-central Nevada were used to determine the recharge percentages by trial-and-error balancing of recharge with estimated ground-water discharges. Watson and others (1976) report that a total of 21 valleys (see Figure 2) was ultimately used in the development of the method, based on Water-Resources Bulletins 8 and 12, and on personal communication with Maxey. Table 1 shows the precipitation zones, referred to by Watson and others (1976) as Hardman zones, and the corresponding recharge coefficients that were developed by Maxey and Eakin. Accordingly, calculation of the Maxey-Eakin recharge for a given basin can be expressed mathematically as:

| | |
|----------|---------|
| CHKD: | |
| REV: | |
| BY: | LA |
| DRAWN: | DDG |
| DATE: | 9-04-92 |
| JOB NO.: | HCI-573 |

MAP SHOWING LOCATION OF THE 21 BASINS USED IN DEVELOPING THE MAXEY-EAKIN METHOD

FIGURE 2


SOURCE: Watson and others (1976)

* subarea within Railroad Valley South

- 212 LAS VEGAS VALLEY
- 207 WHITE RIVER VALLEY
- 188 INDEPENDENCE VALLEY
- 187 GOSHUTE VALLEY
- 186 ANTELOPE VALLEY
- 184 SPRING VALLEY
- 177 CLOVER VALLEY
- 176 RUBY VALLEY
- 173A REVELLE VALLEY
- 173 RAILROAD VALLEY
- 170 PENOYER VALLEY
- 162 PARLUR VALLEY
- 161 INDIAN SPRING VALLEY
- 157 KAMACH VALLEY
- 156 HOT CREEK VALLEY
- 155 DIAMOND VALLEY
- 138 GRASS VALLEY
- 137 BIG SMOKY VALLEY
- 129 BUENA VISTA VALLEY
- 117 FISH LAKE VALLEY
- 69 PARADISE VALLEY

LEGEND


- EXPLANATION
- HYDROGRAPHIC-AREA BOUNDARY (Numbers correspond to those used by Horrell and others-1968)
 - STATE BOUNDARY
 - STUDY AREA BOUNDARY

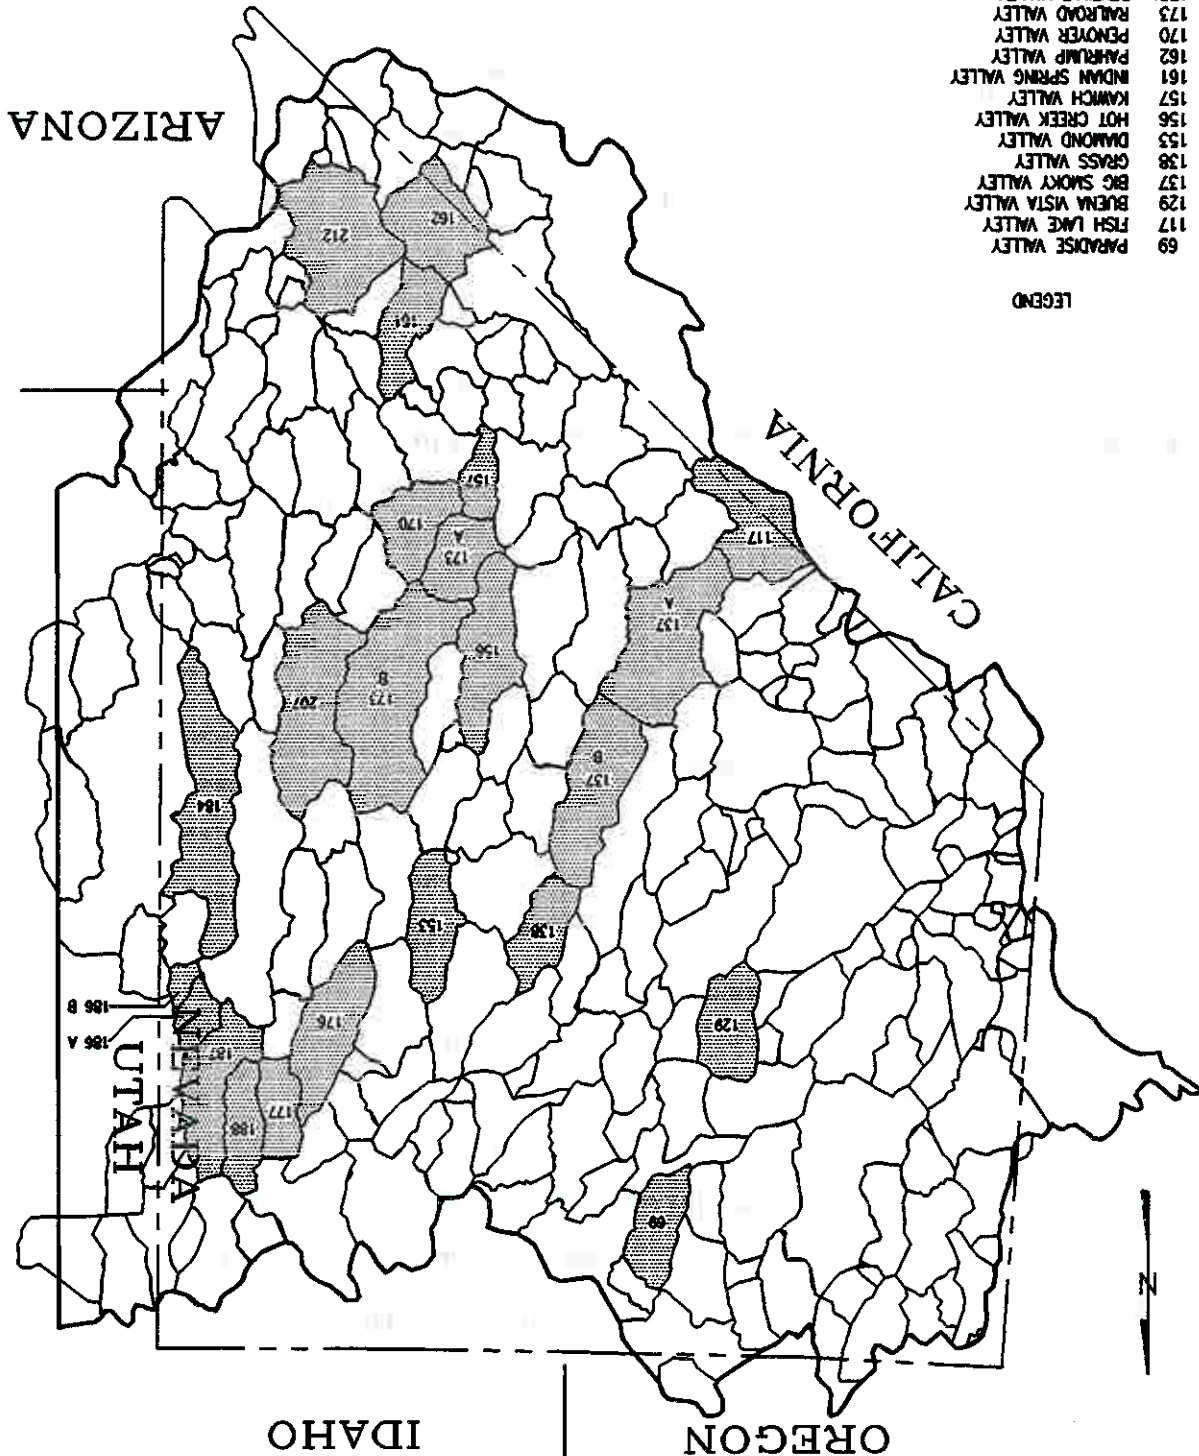

As defined by Maxey and Eakin (Water-Resources Bulletins 8 and 12), the empirical method for calculating recharge is straightforward. However, variations in the method are apparent in its application to basins across Nevada. In the Reconnaissance Reports and Water-Resources Bulletins, both the percentages of recharge applied to each precipitation zone and the estimates of precipitation within each zone have sometimes been adjusted. The adjustments were

3.2 APPLICATION

A schematic depiction of the Maxey-Eakin recharge is given in the water budget shown in Figure 3. Virtually all of the ground-water recharge to a basin originates as precipitation in the mountains. Some of that precipitation is lost to evapotranspiration, some infiltrates directly into the ground water, and some becomes surface-water runoff. Runoff from the mountains onto the alluvial fans provides an additional source of recharge to the ground-water basin. The bold arrows in Figure 3 indicate these two components of the Maxey-Eakin ground-water recharge. In understanding the Maxey-Eakin method, it is important to note that it is a direct relationship between precipitation and recharge, and not a direct relationship between elevation and recharge. Elevation is important only insofar as it is used to estimate the precipitation within each of the five precipitation zones delineated by Maxey and Eakin. The relationship between precipitation and elevation varies across the state of Nevada, depending on geography and climatic conditions. For example, the 12- to 15-inch zone of precipitation falls between 6,000 and 7,000 ft elevation in the San Emidio Desert area (Reconnaissance Report 44), 7,000 and 8,000 ft elevation in the Edwards Creek Valley (Reconnaissance Report 26), and 8,000 and 9,000 ft elevation in the Sarcobatus Flat area (Reconnaissance Report 54). All that is required to apply the Maxey-Eakin method is an estimate of the total volume of precipitation within each of precipitation zones shown in Table 1. Determination of the appropriate precipitation-elevation relationship does have an impact on the accuracy of the estimate of the volume of precipitation within each Hardman zone, but an evaluation of the precipitation-elevation relationships used is not within the scope of this report.

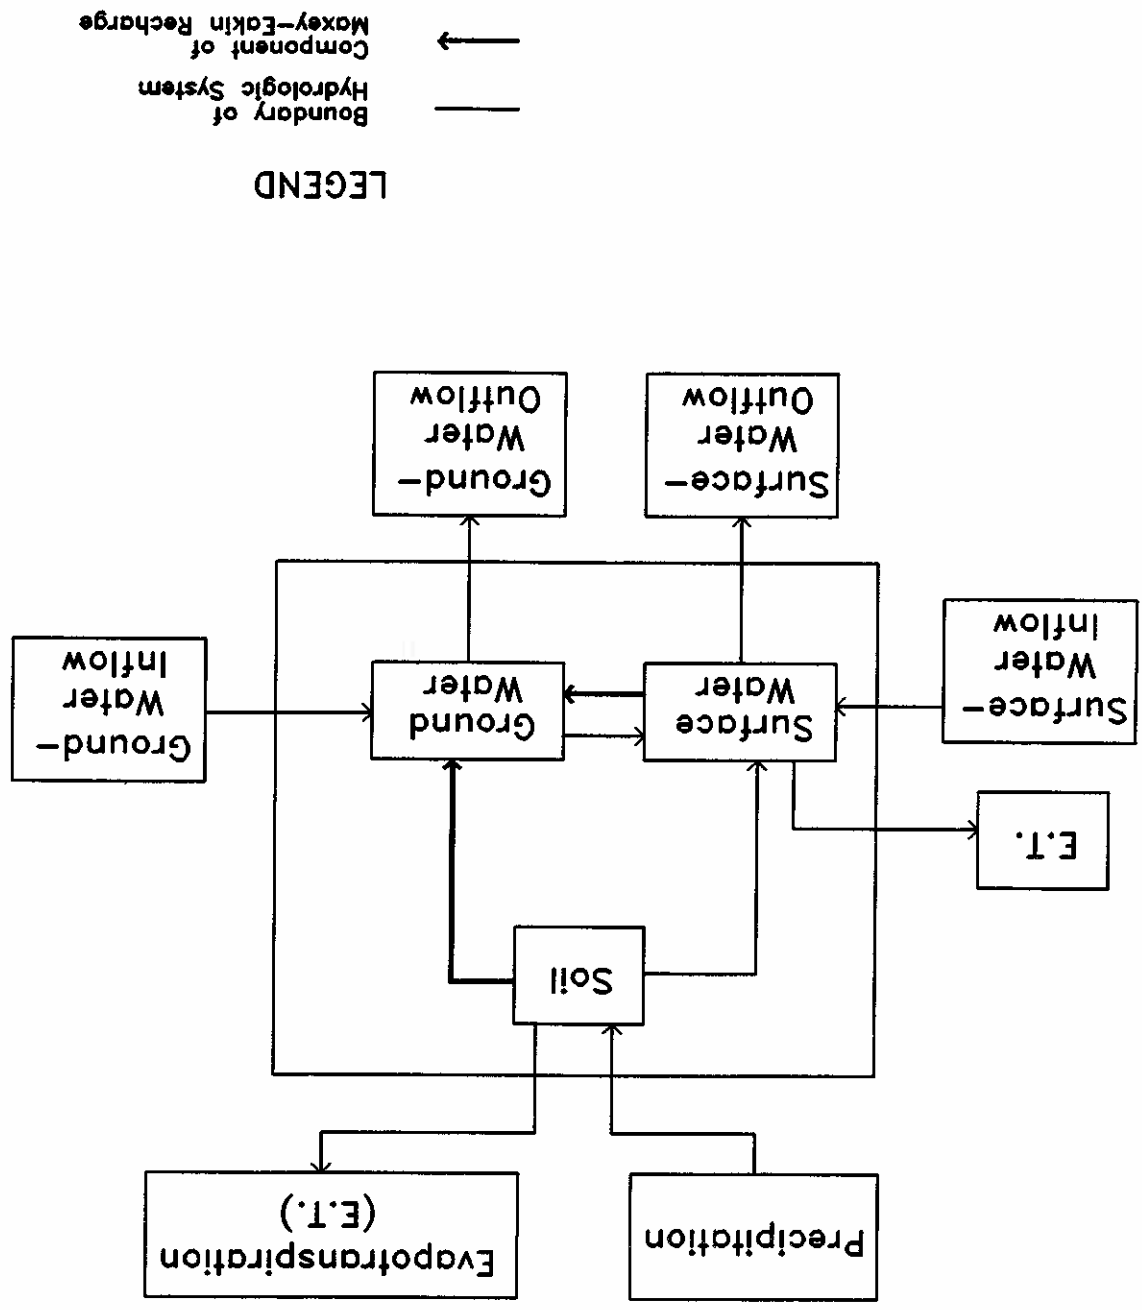

LEGEND

- Boundary of Hydrologic System
- ← Component of Moxy-Eakin Recharge

Maxey-Eakin estimates of recharge within ground-water basins in Nevada are contained within two series of reports published by the State of Nevada, Department of Conservation and Natural Resources: the Ground-Water Reconnaissance Series, a series of 60 reports written between 1960 and 1974, and the Water-Resources Bulletins, which include 44 reports produced between 1946 and 1976. A total of 233 Maxey-Eakin estimates were collected from these reports. However, because of various reasons, some of the recharge estimates were considered potentially unusable in the analysis. The estimates were organized into a computer worksheet, and the following criteria were used to classify the estimates. The categories are similar, but not

4.1 SCREENING OF MAXEY-EAKIN ESTIMATES

The general approach used to evaluate the Maxey-Eakin method involved identifying independent estimates of ground-water recharge to compare with the Maxey-Eakin estimates. In order to compile the data base of estimates, three distinct stages of screening were performed. First, reports by the State of Nevada were reviewed to identify usable Maxey-Eakin recharge estimates. Second, independent estimates of ground-water discharge were identified from these reports, where these discharges were compared to the Maxey-Eakin recharge estimates within a ground-water budget. Third, independent estimates of recharge derived from modeling studies were compiled. The following sections describe each of these procedures.

4.0 APPROACH USED TO EVALUATE MAXEY-EAKIN METHOD

This unevenness in the application of the Maxey-Eakin method introduces complexity into the evaluation process. In this report, as in Watson and others (1976), the "standard" Maxey-Eakin method is defined as in Table 1. Accordingly, arbitrary variations of the method were identified in this analysis. The following section describes in detail the criteria used for screening such "non-standard" Maxey-Eakin estimates.

presumably made to achieve a better balance between estimates of recharge and estimates of ground-water discharge when it was judged that the discharge estimates were more accurate.

entirely coincident, with those developed by Watson and others (1976). The number in brackets after each category corresponds to the total number of estimates in that group.

0. A "standard" Maxey-Eakin estimate, as defined in Table 1, was identified and calculations were given in the report. [146]

1. The Hardman zones for precipitation were not developed (and recharge was not computed) or the zones were inconsistent with those normally used (see Table 1). [26]

2. The water table or capillary fringe was thought to be too close to the ground surface to allow for significant infiltration. Therefore, the Maxey-Eakin method was not applied. [3]

3. The Maxey-Eakin coefficients were changed from the standard values of 25, 15, 7, 3, and 0 percent. Common cases in which this occurred include (1) when precipitation was judged to be less than the Hardman zones indicated, and the Maxey-Eakin coefficients were reduced, and (2) when ground-water recharge was judged to be small because of great depth to the water table. [13]

4. Earlier or duplicate estimate for a valley was discovered. When two differing estimates for a valley were found, the most recent estimate was used. [14]

5. In computing the Maxey-Eakin recharge, values were rounded significantly or an error was made in the calculation, resulting in a greater than 10 percent difference between the computed and the reported values. [16]

6. An estimate reportedly based on the Maxey-Eakin method is given, but no calculations were supplied. [15]

The results show a total of 146 estimates that can be considered as "standard" applications of the Maxey-Eakin method, and 87 estimates that represent deviations from standard application of the method. A listing of the basins that were screened and their corresponding classification numbers from the above list is contained within Appendix A.

4.2 SCREENING OF WATER-BUDGET ESTIMATES

The second level of screening that was performed was to review the Reconnaissance Reports and Water-Resources Bulletins to identify independent estimates of recharge from the ground-water budgets contained within these reports. In basins in which no change in storage could be assumed, estimates of ground-water discharge were identified from the water budgets, and these estimates were taken as independent estimates of recharge. In a few cases, revisions of the ground-water budgets contained within the State publications were reported elsewhere, e.g. in publications by the U.S. Geological Survey, or in journal articles. In these cases, the revised discharge estimates were used for comparison with the Maxey-Eakin recharge estimates.

As with the screening of the Maxey-Eakin recharge estimates, a classification system was developed in order to screen the discharge estimates. Following are the categories that were used, where the number in brackets after each category refers to the total number of estimates within that group.

0. Water-budget estimate of discharge is usable as an independent estimate of recharge. [56]
1. Estimate is for a subarea within a major basin that could not be used individually because only the total discharge for the major basin was given. [31]
2. Component(s) of the ground-water budget were determined by difference. Thus, the estimate of discharge is not independent of the Maxey-Eakin recharge. [64]
3. Ground-water inflow or outflow exists but was not estimated. [23]
4. Ground-water inflow was estimated by an analog model, and the results are considered as provisional. [1]
5. Ground-water discharge from within the basin cannot be separated out from the total discharge, i.e., both surface water and ground water. [6]
6. A major river flows through the valley, and surface-water inflow and outflow dominate the water budget in comparison to ground-water recharge and discharge within the basin. Therefore, mainstem areas were rejected. [26]

Potential bias may exist within this group of estimates, however, because the methods historically used to develop the water budgets may have a subjective component that is not easily identified from the State reports. In certain cases, knowledge about the discharge may have been considered in developing a Maxey-Eakin recharge estimate. This is what probably resulted in the various "non-standard" applications of the Maxey-Eakin method. Arguably, the set of 56 estimates should be reduced by the number that have "non-standard" Maxey-Eakin recharge estimates, since adjustment of the Maxey-Eakin method may have reduced the difference between the Maxey-Eakin estimates and the discharge estimates. Of the 56 discharge estimates, 16 have corresponding Maxey-Eakin recharge values that were computed in a non-standard way. Removing these 16 estimates leaves the 40 estimates listed in Table 2. These 40 independent estimates of discharge that are derived from water budgets will be referred to as the "budget estimates" throughout the remainder of the report. The locations of the basins for the 40 budget

that basin.

The results of this screening process indicated that, of the 229 water budgets reviewed, 56 estimates of discharge were usable as independent estimates of recharge. Appendix A gives a complete listing of each basin and the corresponding classification of the discharge estimate for

7. Evapotranspiration by phreatophytes occurs but was not estimated and included in the discharge estimate. [1]
8. Evaporation from playas, which is either unreliably estimated or not estimated, is a significant portion of the total discharge. [2]
9. Uncertainty in the water budget results from transient interactions between a lake and ground water. Examples are: (1) lake desiccation that results from depletion of ground-water storage, and (2) lowering of lake water levels, which affects ground-water storage. [4]
10. Either an earlier estimate that was later revised, or a duplicate of an estimate reported elsewhere. [9]
11. Discharge estimate was reported, but no Maxey-Eakin recharge was computed, or Maxey-Eakin calculation found to be erroneous. [6]
12. No water budget was reported. [2]

estimates are shown in Figure 4. A comparison with Figure 2 shows that six of these basins are in the set that was reportedly used to develop the Maxey-Eakin method.


TABLE 2
LIST OF THE 40 WATER-BUDGET ESTIMATES OF RECHARGE

| Hydrographic Area | BASIN | MAXEY-EAKIN RECHARGE (AC-FT/YR) | WATER-BUDGET DISCHARGE (AC-FT/YR) | SOURCE |
|-------------------|----------------------------------|---------------------------------|-----------------------------------|-------------|
| 16 | DUCK LAKE | 9000 | 7000 | R17 |
| 18 | PAINTERS FLAT | 1300 | 1200 | R44 |
| 21 | SMOKE CREEK DESERT | 13000 | 18620 | R44 |
| 22 | SAN EMIDIO DESERT | 2100 | 3200 | R44 |
| 24 | HUALAPAI FLAT | 7000 | 6700 | R11, B37 |
| 29 | PINE FOREST | 10000 | 14100 | R4 |
| 53 | PINE | 45500 | 24000 | R2, B32 |
| 55 | CARGO LAKE | 4300 | 4500 | R37 |
| 71 | GRASS (HUMBOLDT) | 12000 | 16800 | R29, B32 |
| 84 | WARM SPRINGS | 6000 | 2000 | R43 |
| 85 | SPANISH SPRINGS | 600 | 1000 | R43 |
| 86 | SUN | 50 | 25 | R43 |
| 92 | LEMON | 1800 | 900 | R43 |
| 95 | DRY | 2400 | 2300 | R43 |
| 96 | NEWCOMB LAKE | 300 | 130 | R43 |
| 97 | HONEY LAKE (E ONLY) | 1500 | 10500 | R43 |
| 111 | ALKALI N | 400 | 300 | R52 |
| 113 | HUNTOON | 800 | 300 | R52 |
| 114 | THEL'S MARSH | 1300 | 1400 | R52 |
| 117 | FISH LAKE | 33000 | 27000 | R58 |
| 118 | COLUMBUS SALT MARSH | 700 | 3800 | R52 |
| 119 | RHODES SALT MARSH | 500 | 600 | R52 |
| 121 | SODA SPRING E | 600 | 700 | R52 |
| 121-127 | EASTGATE, COWKICK, SODA SPRING W | 100 | -270 | R52 |
| 128 | DIXIE | 6000 | 9200 | R23 |
| 132 | JERSEY | 800 | 800 | R23 |
| 133 | EDWARDS CREEK | 8000 | 7600 | R26 |
| 134 | SMITH CREEK | 9600 | 7000 | R28, P1409E |
| 136 | MONTE CRISTO | 500 | 400 | R52 |
| 138 | GRASS (LANDER) | 13000 | 13000 | R37 |
| 150 | LITTLE FISH LAKE | 11000 | 10000 | R38 |
| 153 | DIAMOND total | 21000 | 21000 | R6, B35 |
| 156 | HOT CREEK | 7000 | 6100 | R38 |
| 170 | PENOYER | 4300 | 3800 | R60 |
| 178 | BUTTE S | 15000 | 12000 | R49 |
| 178 | BUTTE N | 3900 | 8700 | R49 |
| 179 | STEEPTOE | 85000 | 70000 | R42 |
| 183 | LAKE | 13000 | 11500 | R24 |
| 184 | SPRING | 75000 | 74000 | R33 |

1 Ground-water discharges are adjusted by removing any additional ground-water inflows reported in the water budget, allowing comparison with Maxey-Eakin recharge.
 2 R = Reconnaissance Report, Nevada Department of Conservation and Natural Resources
 B = Water-Resources Bulletin, Nevada Department of Conservation and Natural Resources
 P = U.S. Geological Survey Professional Paper

MAP SHOWING LOCATION OF BASINS FOR THE 40 BUDGET ESTIMATES

| | |
|-----------------|---------------|
| JOB NO. HCI-573 | DATE: 9-04-92 |
| BY: LA | DRAWN: DDG |
| CHKD: | REV: |




EXPLANATION

HYDROGRAPHIC-AREA BOUNDARY ————

STATE BOUNDARY - - - - -

STUDY AREA BOUNDARY _____

(Numbers correspond to those used by Hornell and others—1985).

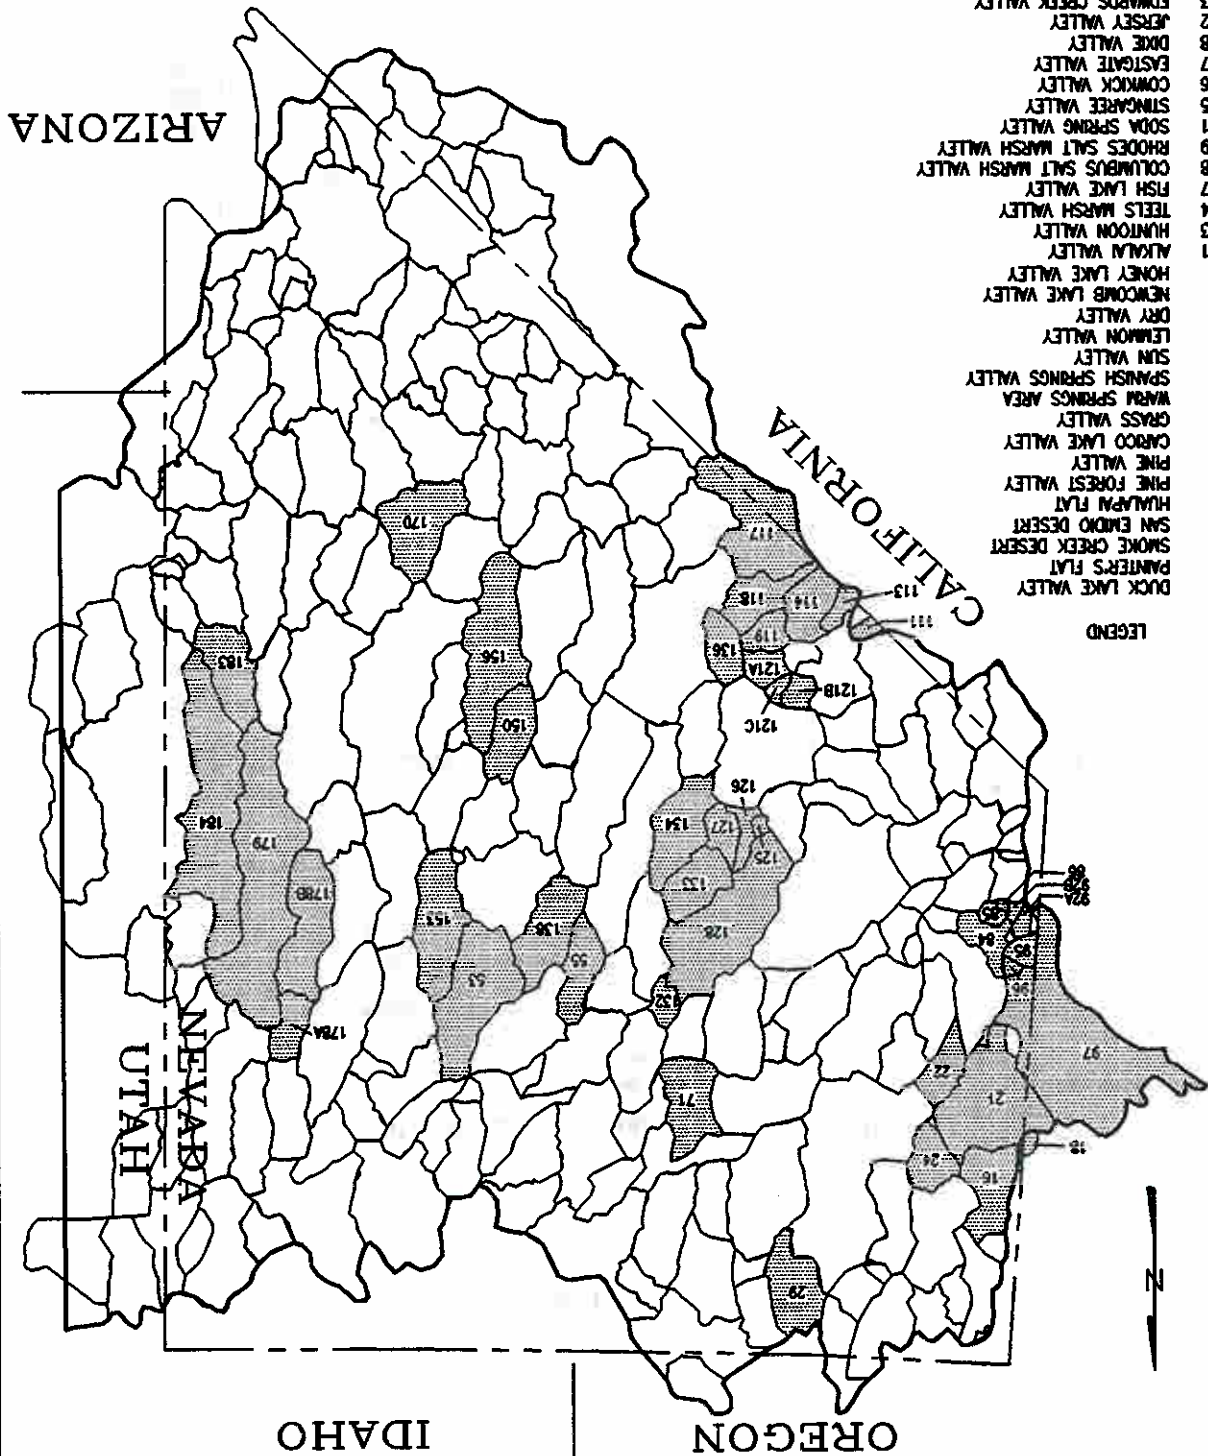

- 184 SPRING VALLEY
- 183 LAKE VALLEY
- 179 STEPTOE VALLEY
- 1788 BUTTE VALLEY (SOUTH)
- 178A BUTTE VALLEY (NORTH)
- 170 PENNYER VALLEY
- 156 HOT CREEK VALLEY
- 153 DIAMOND VALLEY
- 150 LITTLE FISH LAKE VALLEY
- 138 GRASS VALLEY
- 136 MONTE CRISTO VALLEY
- 134 SMITH CREEK VALLEY
- 133 EDWARDS CREEK VALLEY
- 132 JERSEY VALLEY
- 128 DOXE VALLEY
- 127 EASTGATE VALLEY
- 126 CONKICK VALLEY
- 125 STINGAREE VALLEY
- 121 SODA SPRING VALLEY
- 119 RHODES SALT MARSH VALLEY
- 118 COLUMBUS SALT MARSH VALLEY
- 117 FISH LAKE VALLEY
- 114 TEELS MARSH VALLEY
- 113 HUNTOON VALLEY
- 111 ALKALI VALLEY
- 97 HONEY LAKE VALLEY
- 96 NEWCOMB LAKE VALLEY
- 95 DRY VALLEY
- 92 LEMON VALLEY
- 86 SUN VALLEY
- 85 SPANISH SPRINGS VALLEY
- 84 WARRA SPRINGS AREA
- 71 GRASS VALLEY
- 55 CARDO LAKE VALLEY
- 53 PINE VALLEY
- 29 PINE FOREST VALLEY
- 24 HUAPAI FLAT
- 22 SAN EMILIO DESERT
- 21 SMOKE CREEK DESERT
- 18 PAINTER'S FLAT
- 16 DUCK LAKE VALLEY

LEGEND

The third stage in gathering the data base used in the analysis was to conduct a general literature review to identify other independent estimates of ground-water recharge for basins within Nevada. Sources for the estimates collected included U.S. Geological Survey reports, publications of the Desert Research Institute of the University of Nevada, and scholarly articles. A total of 27 independent estimates of recharge that were derived from techniques other than water budgeting were identified during this process. The methods used to derive these recharge estimates include the following, where the numbers in brackets refer to the total number of estimates:

- Chloride mass balance [12],
- Deuterium-calibrated mixing-cell flow model [11],
- Numerical ground-water flow models [3], and
- Infiltration model [1].

Because most of these estimates were obtained using models, this group of 27 estimates will be referred to as the "model estimates." The 27 model estimates are listed in Table 3, and Figure 5 shows the locations of the basins for the group. Each of the types of model estimates is discussed briefly below.

The 12 chloride mass balance estimates of recharge were reported in two publications (Dettinger, 1989; Thomas and others, 1989). In Dettinger's study, a total of 16 estimates were derived. However, only 11 of the estimates were used in this analysis. The estimates in three basins (N. Butte, Mesquite, and N. Railroad) were excluded based on a discussion of their recharge estimates by Dettinger (1989). Dettinger noted that the chloride balance estimates in these basins may be inaccurate because subsurface inflows that were not considered may have resulted in an underestimate of recharge. Therefore, these three estimates were rejected. An additional estimate (for Independence Valley) was rejected because there was no documented Maxey-Eakin recharge estimate with which to compare it. Finally, one of the estimates (for Upper Reese

TABLE 3. LIST OF THE 27 MODEL ESTIMATES OF RECHARGE

| HYDROGRAPHIC AREA | BASIN | MAXIMUM RECHARGE (AC-FYR) | MODEL ESTIMATED RECHARGE (AC-FYR) | TYPE OF ESTIMATE | SOURCE ¹ |
|-------------------|--------------------|---------------------------|-----------------------------------|--------------------|--------------------------------|
| 16 | DUCK LAKE | 9000 | 9000 | chloride balance | Dedinger, JH 106 |
| 92 | LEMBRON | 1800 | 1800 | chloride balance | Dedinger, JH 106 |
| 97 | HONEY LAKE total | 95000 | 99000 | infiltration model | Handman & others, WRIR 90-4050 |
| 103B | HONEY LAKE subarea | 17000 | 22200 | gw flow model | Handman & others, WRIR 90-4050 |
| 117 | STAGECOACH | 400 | 400 | chloride balance | Dedinger, JH 106 |
| 122 | FISH LAKE | 33000 | 27000 | chloride balance | Dedinger, JH 106 |
| 134 | GABBS | 5200 | 5200 | chloride balance | Dedinger, JH 106 |
| 153 | SMITH CREEK | 9600 | 8300 | chloride balance | Thomas & others, P1409E |
| 162 | DIAMOND S SUBAREA | 12000 | 10500 | chloride balance | Dedinger, JH 106 |
| 170 | PAHRUMP | 26000 | 37000 | gw flow model | Hartill, WSP-2279 |
| 171-172 | PENOYER | 4300 | 3200 | chloride balance | Dedinger, JH 106 |
| 173 | COAL/GARDEN | 12000 | 11000 | deuterium model | Kirk & Campans, JH 119 |
| 174 | RAILROAD S | 5500 | 5000 | chloride balance | Dedinger, JH 106 |
| 175 | JAKES | 17000 | 20700 | deuterium model | Kirk & Campans, JH 119 |
| 178 | LONG (WRFS) | 10000 | 1700 | deuterium model | Kirk & Campans, JH 119 |
| 180 | BUTTE (S) | 15000 | 12000 | chloride balance | Dedinger, JH 106 |
| 181 | CAVE | 14000 | 12000 | deuterium model | Kirk & Campans, JH 119 |
| 182 | DRY LAKE | 5000 | 6700 | deuterium model | Kirk & Campans, JH 119 |
| 184 | DELAMAR | 1000 | 1800 | deuterium model | Kirk & Campans, JH 119 |
| 206 | KANE SPRINGS | 75000 | 62000 | chloride balance | Dedinger, JH 106 |
| 207 | WHITE RIVER | 500 | 1000 | deuterium model | Kirk & Campans, JH 119 |
| 208 | PAHROC | 38000 | 35000 | deuterium model | Kirk & Campans, JH 119 |
| 209 | PAHRANAGAT | 2200 | 2000 | deuterium model | Kirk & Campans, JH 119 |
| 210 | COYOTE SPRINGS | 1800 | 1500 | deuterium model | Kirk & Campans, JH 119 |
| 212 | LAS VEGAS N ONLY | 2100 | 5300 | deuterium model | Kirk & Campans, JH 119 |
| 212 | LAS VEGAS | 28000 | 27600 | chloride balance | Dedinger, JH 106 |
| 212 | LAS VEGAS | 30000 | 30000 | gw flow model | B44 |

¹ Abbreviations:

- JH = Journal of Hydrology
- WRIR = U.S. Geological Survey Water-Resources Investigations Report
- P = U.S. Geological Survey Professional Paper
- WSP = U.S. Geological Survey Water-Supply Paper
- B = Water-Resources Bulletin, Nevada Department of Conservation and Natural Resources

MAP SHOWING LOCATION OF BASINS FOR THE 27 MODEL ESTIMATES

| | |
|-----------------|----------|
| JOB NO. HCI-573 | CHRD: LA |
| DATE: 9-04-92 | BY: DDC |
| | REV: DDC |




EXPLANATION

————— HYDROGRAPHIC-AREA BOUNDARY
 - - - - - STATE BOUNDARY
 _____ STUDY AREA BOUNDARY

(Numbers correspond to those used by Hornell and others—1988).

- LEGEND**
- 16 DUCK LAKE VALLEY
 - 92 LEMMON VALLEY
 - 97 HONEY LAKE VALLEY
 - 1038 STAGECOACH VALLEY
 - 117 FISH LAKE VALLEY
 - 122 GIBBS VALLEY
 - 134 SMITH CREEK VALLEY
 - 153 DIAMOND VALLEY (SOUTH)
 - 162 PARKMAN VALLEY
 - 170 PENOVER VALLEY
 - 171 COAL VALLEY
 - 172 GARDEN VALLEY
 - 173A RAILROAD VALLEY (SOUTH)
 - 174 JAMES VALLEY
 - 175 LONG VALLEY
 - 1788 BUTTE VALLEY (SOUTH)
 - 180 CAVE VALLEY
 - 181 DRY LAKE VALLEY
 - 182 DELMAR VALLEY
 - 184 SPRING VALLEY
 - 206 KANE SPRINGS VALLEY
 - 207 WHITE RIVER VALLEY
 - 208 PARKROC VALLEY
 - 209 PARKMAN VALLEY
 - 210 COYOTE SPRING VALLEY
 - 212 LAS VEGAS VALLEY

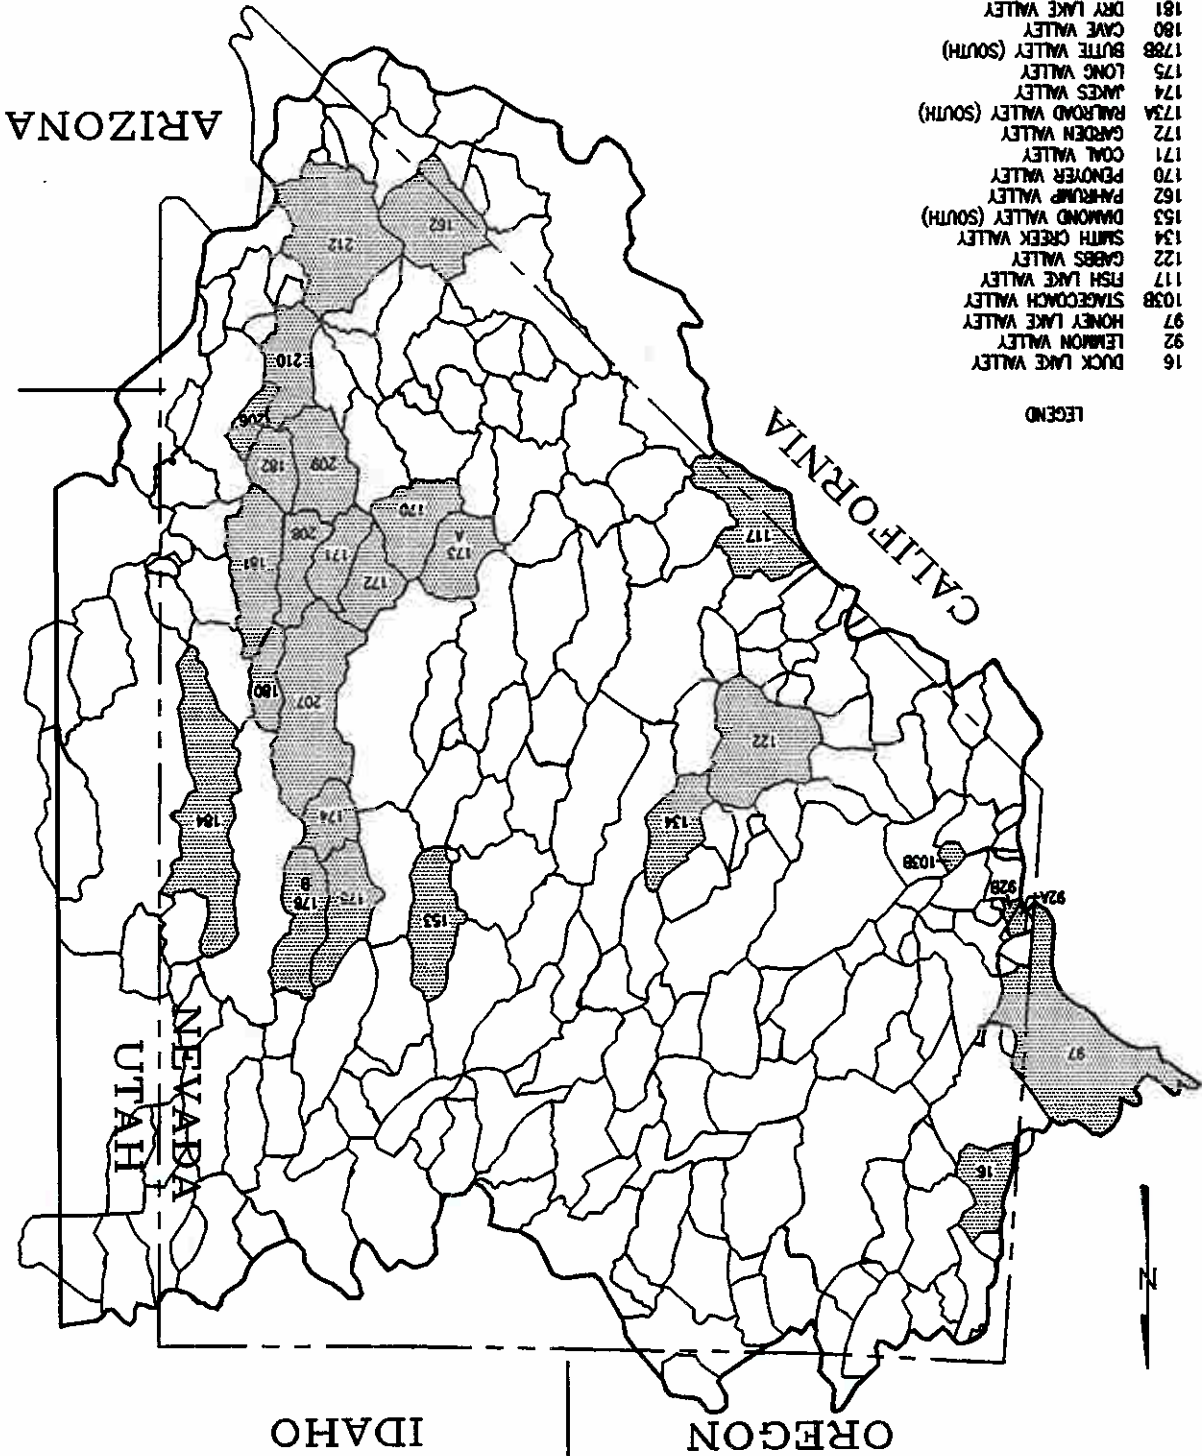

The study of Honey Lake Valley (Handman and others, 1990) provided a second independent estimate of recharge that was based on the results of an infiltration model. Direct infiltration of precipitation was estimated using a numerical model that determines the soil-moisture budget (evapotranspiration, runoff, and recharge) based on long-term data for precipitation, temperature, soil characteristics, and vegetative cover. Surface-water infiltration was separately estimated

calibration. in this model were derived from an infiltration model, but were adjusted during model for a subarea within Honey Lake Valley. The recharge values initially selected for use third estimate (Handman and others, 1990) was obtained from a numerical ground-water flow The second estimate (Hartill, 1986), for Pahump Valley, was developed in a similar way. The calibrated in the model, along with transmissivity values, to match measured hydraulic heads. state ground-water flow conditions in Las Vegas Valley. Recharge was one of the parameters models. The first estimate (Water-Resources Bulletin 44) was developed by simulating steady- Three independent estimates of recharge were obtained from numerical ground-water flow

mean recharge from the three scenarios was selected. this analysis, where a range of recharge values was reported by Kirk and Campana (1990), the flow scenarios were calibrated; however, a consistent set of recharge values was obtained. For was calibrated using the spatial distribution of the deuterium isotope. Three slightly different underlying an alluvial layer. Assumptions regarding the flow paths were made, and the model are routed. A two-layer hydrologic system was modeled, assuming a carbonate layer The model consists of an interconnected network of cells through which water and deuterium flow model of the White River Flow System in southeastern Nevada (Kirk and Campana, 1990). Eleven independent estimates of recharge were derived using a deuterium-calibrated mixing-cell

chloride mass balance estimate was obtained for Smith Creek Valley from Thomas and others computed in a non-standard way. In addition to the 11 estimates by Dettinger (1989), one River Valley) was rejected because the corresponding Maxey-Eakin recharge estimate was (1989).

from streamflow data and added to the direct infiltration computed by the model to obtain an estimate of 99,000 acre-ft/yr for the total ground-water recharge to Honey Lake Valley.

5.0 DISCUSSION OF RESULTS

The screening processes described previously resulted in 40 water-budget estimates and 27 model estimates of recharge for comparison to their corresponding Maxey-Eakin recharge estimates. Table 4 summarizes the characteristics of the two groups of estimates. Together, the 67 independent estimates cover a total of 57 basins in Nevada. The number of basins covered is fewer than 67 because there is some overlap between the two groups of estimates, and also because within one group, there may be more than one estimate for a particular basin. For the purposes of the analysis, the two groups of estimates were separately compared to the Maxey-Eakin estimates to see if any differences in the groups were apparent.

TABLE 4

GROUPING OF RECHARGE ESTIMATES IDENTIFIED BY SCREENING PROCESS

| Group | Number | Description | Source |
|------------------|--------|--|---|
| Budget Estimates | 40 | Recharge estimates determined from independent estimates of discharge reported in ground-water budgets. | Nevada Department of Conservation and Natural Resources: <ul style="list-style-type: none"> ● Reconnaissance Reports ● Water-Resources Bulletins |
| Model Estimates | 27 | Recharge estimates determined from geochemical models (23), numerical flow models (3), and infiltration model (1). | <ul style="list-style-type: none"> ● U.S. Geological Survey reports ● Desert Research Institute, University of Nevada reports ● Journal articles |

$$ME = ME' + e_{ME} \quad (5)$$

$$D = D' + e_D \quad (6)$$

components

Each value of ME and D can be considered as a random variable with a probability distribution having an expected value and associated uncertainty, i.e., a mean and a variance or standard deviation. Accordingly, the values ME and D can each be broken down into random-variable

$$ME = \text{the Maxey-Eakin recharge estimate (acre-ft/yr), and}$$

$$D = \text{the independent estimate of discharge (acre-ft/yr).}$$

where

$$R = ME - D \quad (4)$$


the difference in the estimates is the residual R , where


Several definitions are necessary for the analysis. For each pair of estimates within a group,

An analysis can be performed to evaluate the uncertainty in both groups of Maxey-Eakin estimates, i.e., the 40 budget estimates and the 27 model estimates. If either group of basins is taken as representative of any ground-water basin in Nevada, then the uncertainty determined from this analysis provides a measure of the uncertainty in the Maxey-Eakin method in general.

5.1 ANALYSIS OF UNCERTAINTY

As a qualitative evaluation of the degree of agreement between the Maxey-Eakin recharge estimates and the two groups of independent estimates, scatter diagrams were prepared. Figure 6 shows the scatter for the group of 40 water-budget estimates of recharge. Figure 7 shows the scatter for the group of 27 model estimates of recharge. A line having a one-to-one slope is shown on both plots for comparison. If the pairs of estimates were in perfect agreement, all of the points would fall on this line. The scatter of the points about this line is a measure of the degree of agreement between the Maxey-Eakin estimates and the independent estimates. From the scatter diagrams, one may conclude that the general agreement between the Maxey-Eakin estimates and the independent estimates indicates that the Maxey-Eakin method is fairly good.

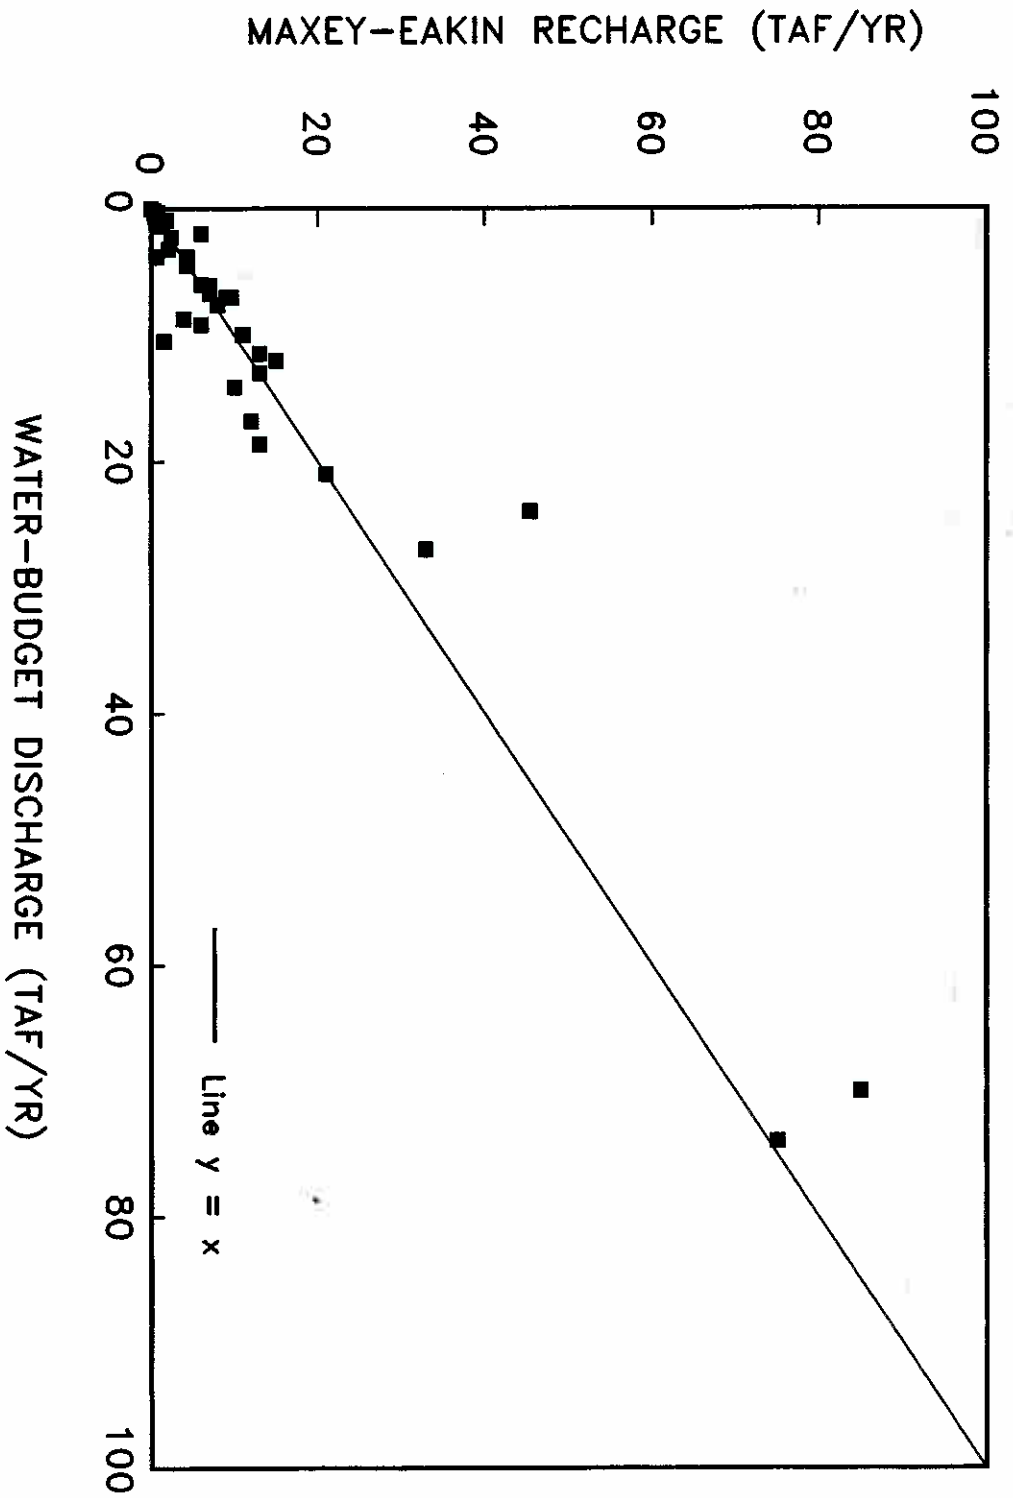

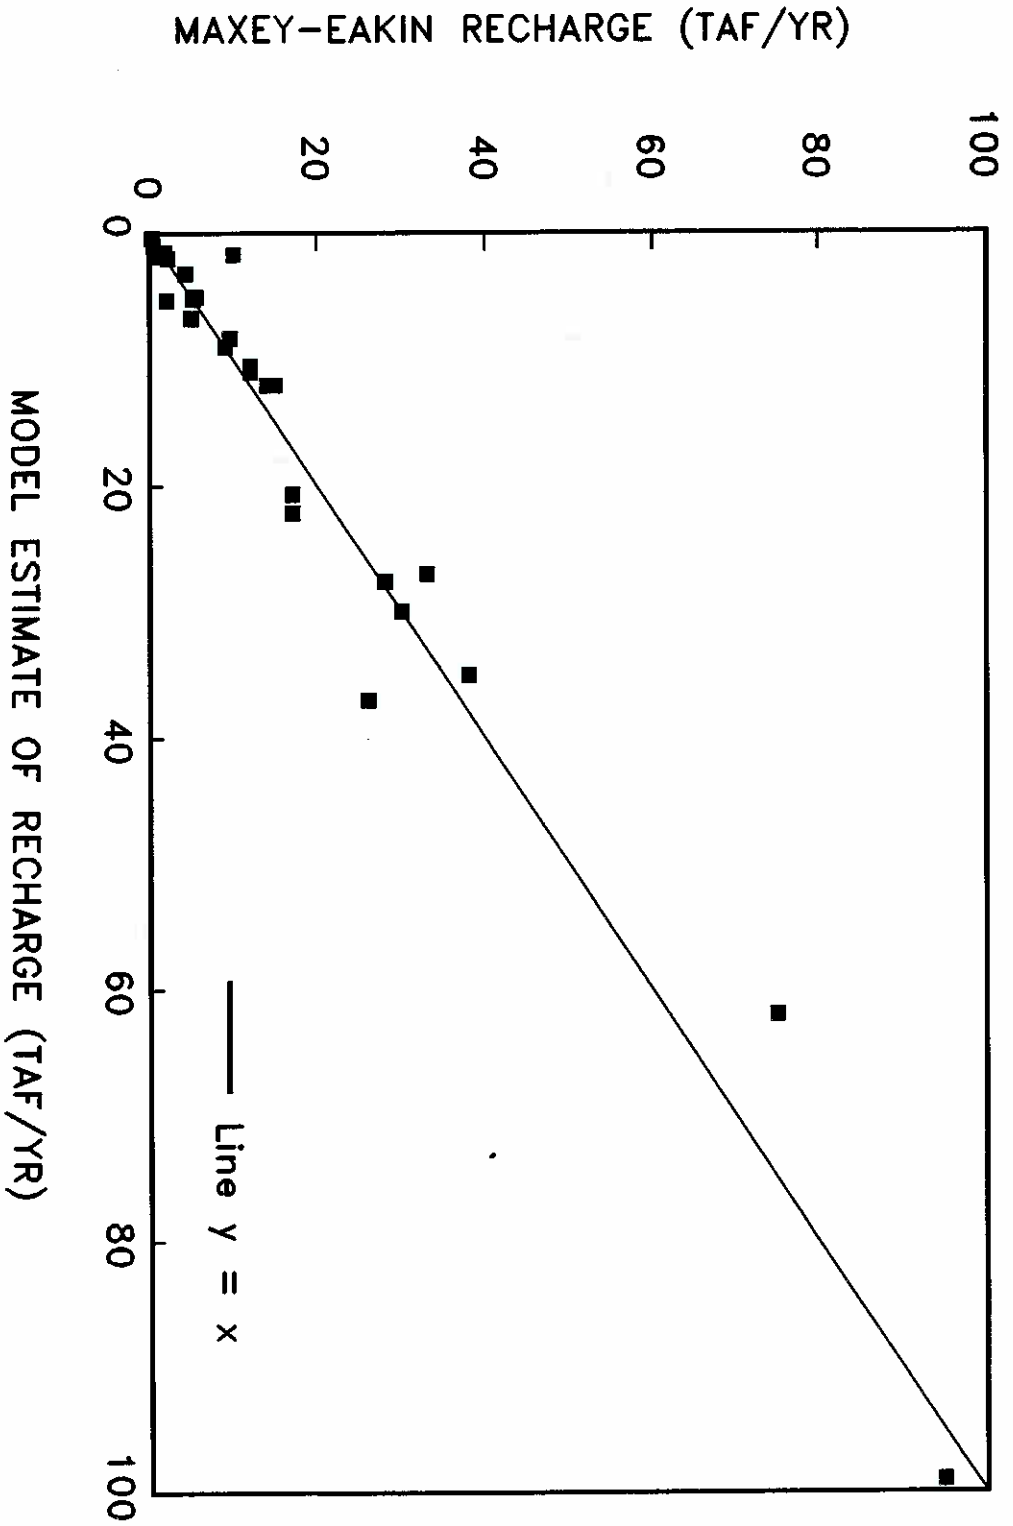

$$\text{Var}[e_{ME}] = \text{Var}[R] - \text{Var}[e_D] \quad (11)$$

Finally, rearranging gives

$$\text{Var}[R] = \text{Var}[e_{ME}] + \text{Var}[e_D] \quad (10)$$

where it is assumed that the x_i are not correlated. Applying this relation to Equation 8 produces

$$\text{Var}[V] = \sum_{i=1}^n \left[\frac{\partial g}{\partial x_i} \right]^2 \text{Var}[x_i] \quad (9)$$

The degree of uncertainty in the Maxey-Eakin method can be evaluated by determining the structure of the random variable e_{ME} , i.e., the variance or the standard deviation of the distribution. The appropriate formula for the variance of a function of the form $y = g(x_n)$ is as follows (Benjamin and Cornell, 1970):

$$R = e_{ME} - e_D \quad (8)$$

Therefore, substituting Equations 5, 6, and 7 into Equation 4 above gives an expression for the residual as follows:

$$ME' = D' \quad (7)$$

However, by definition,

$$\begin{aligned} ME' &= \text{the true value for the Maxey-Eakin recharge,} \\ D' &= \text{the true value for the discharge,} \\ e_{ME} &= \text{the error in the Maxey-Eakin recharge estimate, and} \\ e_D &= \text{the error in the estimate of discharge.} \end{aligned}$$

where

where
 σ = the standard deviation of the distribution, and
 μ = the mean of the distribution.

$$c_v = \frac{\sigma}{\mu}$$

(14)

The coefficient of variation c_v , which gives a measure of the relative dispersion or closeness of the set of values, can be computed from the relation

The relation expressed by Equation 13 can now be applied to both groups of estimates-- the 40 water-budget estimates and the 27 model estimates. As calculated from the 40 water-budget residuals, $\sigma[R]$ is 4,800 acre-ft/yr. Therefore, as an upper bound on $\sigma[e_{ME}]$, the standard deviation of the Maxey-Eakin estimate for a particular ground-water basin in this group is 4,800 acre-ft/yr. For the group of 27 estimates, the upper bound on the standard deviation of the Maxey-Eakin estimate is 4,300 acre-ft/yr.

$$\sigma[e_{ME}] \leq \sigma[R]$$

(13)

Because it has the same units as the estimate, the standard deviation is a more convenient measure of uncertainty than the variance. The above relation can be expressed in terms of standard deviations by taking the square root of both sides, giving

$$\text{Var}[e_{ME}] \leq \text{Var}[R]$$

(12)


This relationship gives the variance in the Maxey-Eakin errors as a function of the variance in the residuals and the variance in the discharge errors. The term $\text{Var}[R]$ can be computed directly from the 40 residuals. However, the term $\text{Var}[e_{ME}]$ is not known. Therefore, the known value of $\text{Var}[R]$ will provide an upper bound on the value of $\text{Var}[e_{ME}]$, since Equation 11 dictates that

For the group of 40 estimates, the maximum standard deviation of 4,800 acre-ft/yr is divided by the mean Maxey-Eakin estimate, which is 10,800 acre-ft/yr, to obtain a coefficient of variation no greater than 0.44, or 44 percent. For the group of 27 estimates, the maximum standard deviation of 4,300 acre-ft/yr is divided by the mean Maxey-Eakin estimate, which is 17,400 acre-ft/yr, to produce a coefficient of variation no greater than 0.25, or 25 percent.


The results of this uncertainty analysis indicate that the degree of uncertainty in a Maxey-Eakin estimate is somewhat less for the group of model estimates than for the group of water-budget estimates. As the model estimates were generally derived later in time than the water-budget estimates and presumably utilized previous knowledge about a basin, this result is not surprising. If the errors in each group of Maxey-Eakin estimates were normally distributed, 68 percent of these values would fall within plus or minus one standard deviation of the mean. As a qualitative assessment of the shape of the distribution of e_{ME} , the distribution of the residuals R can be examined for each group of estimates. Figures 8 and 9 show histograms of the 40 and 27 residuals, respectively. The mean residuals are 600 and 400 ac-ft/yr for the two groups, respectively. It can be demonstrated statistically that these sample means are not significantly different from a mean of zero. Therefore, although both mean residuals are greater than zero, there is no indication of statistical bias in the Maxey-Eakin method.

Figures 8 and 9 indicate one standard deviation in either direction from the mean of the distribution and show the number of residuals within this range. For the group of 40 residuals, this range contains 83 percent of the residuals. For the group of 27 residuals, this range contains 78 percent of the residuals. Thus, for both groups of estimates, the residuals are clustered more closely about the mean than they would be in a normal distribution.

83% of residuals are within one standard deviation of the mean (0.6 taf/yr)

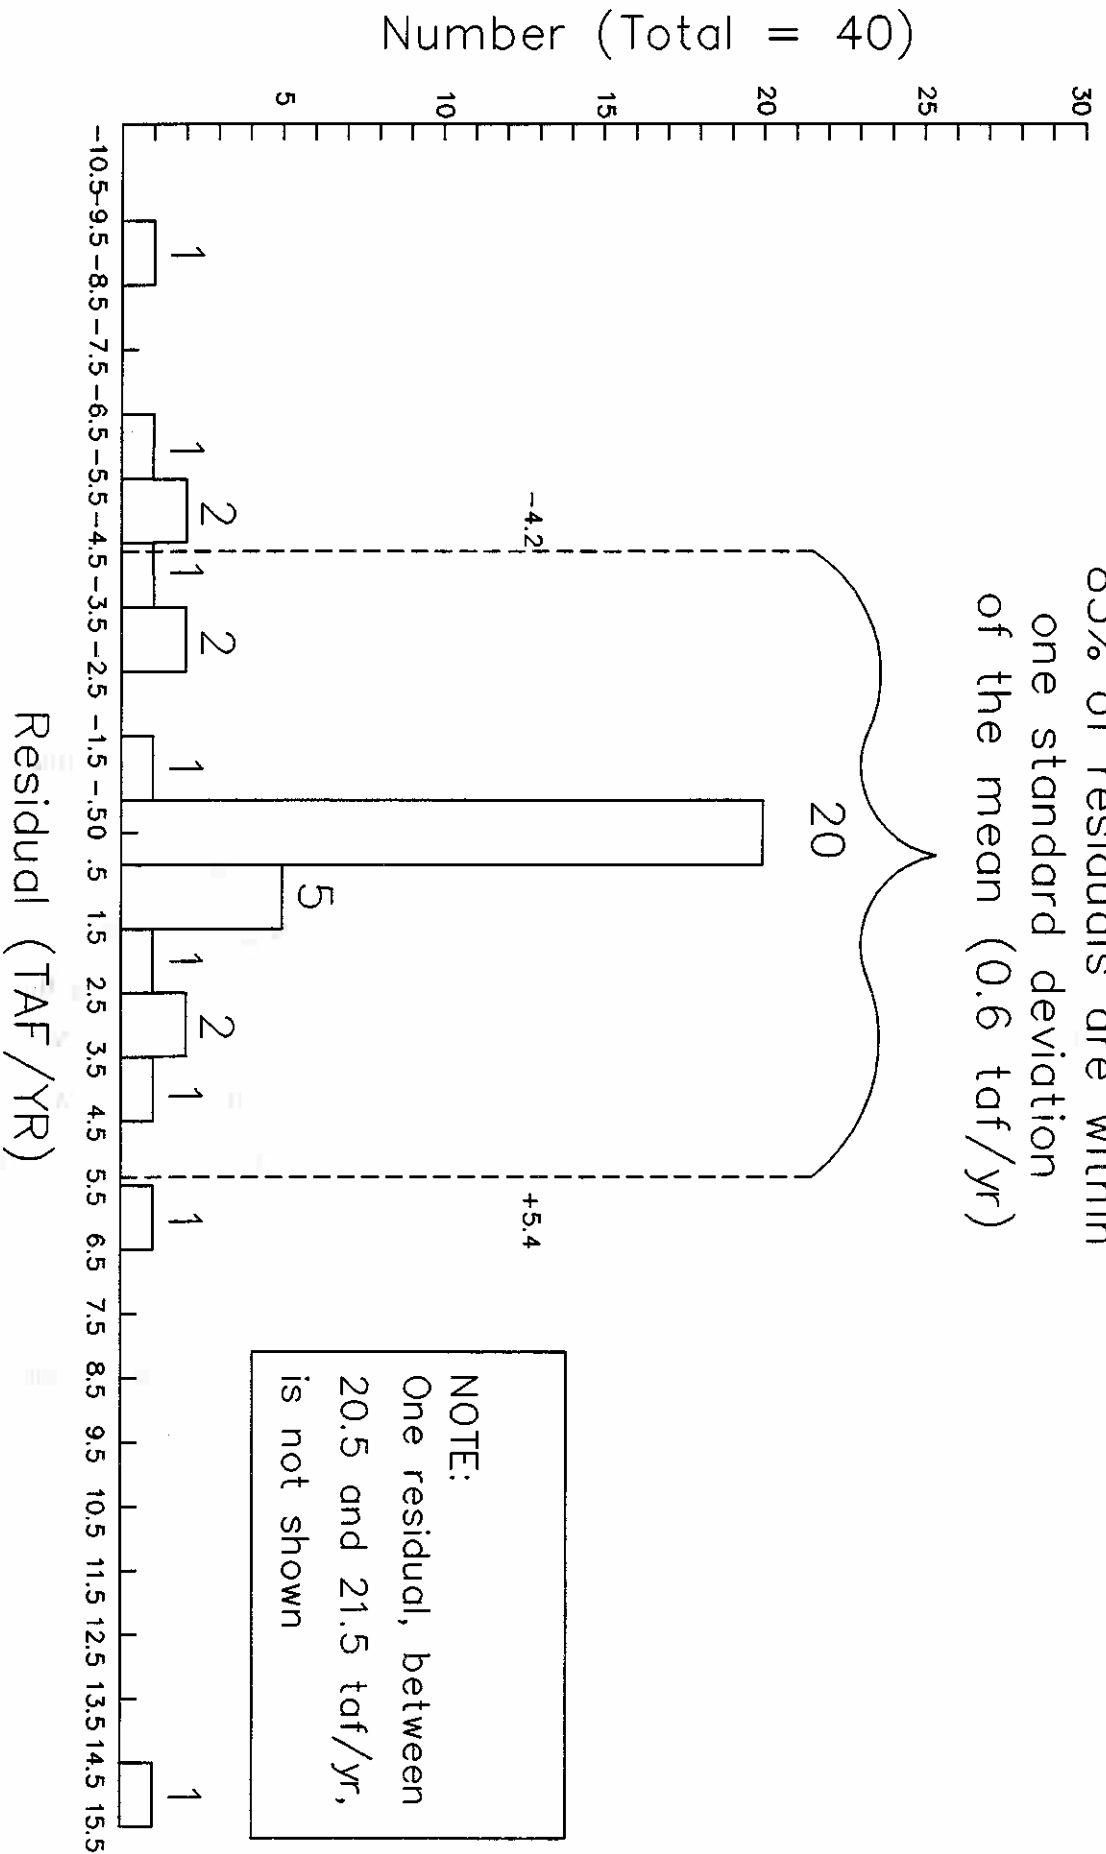

78% of residuals are within one standard deviation of the mean (0.4 taf/yr)

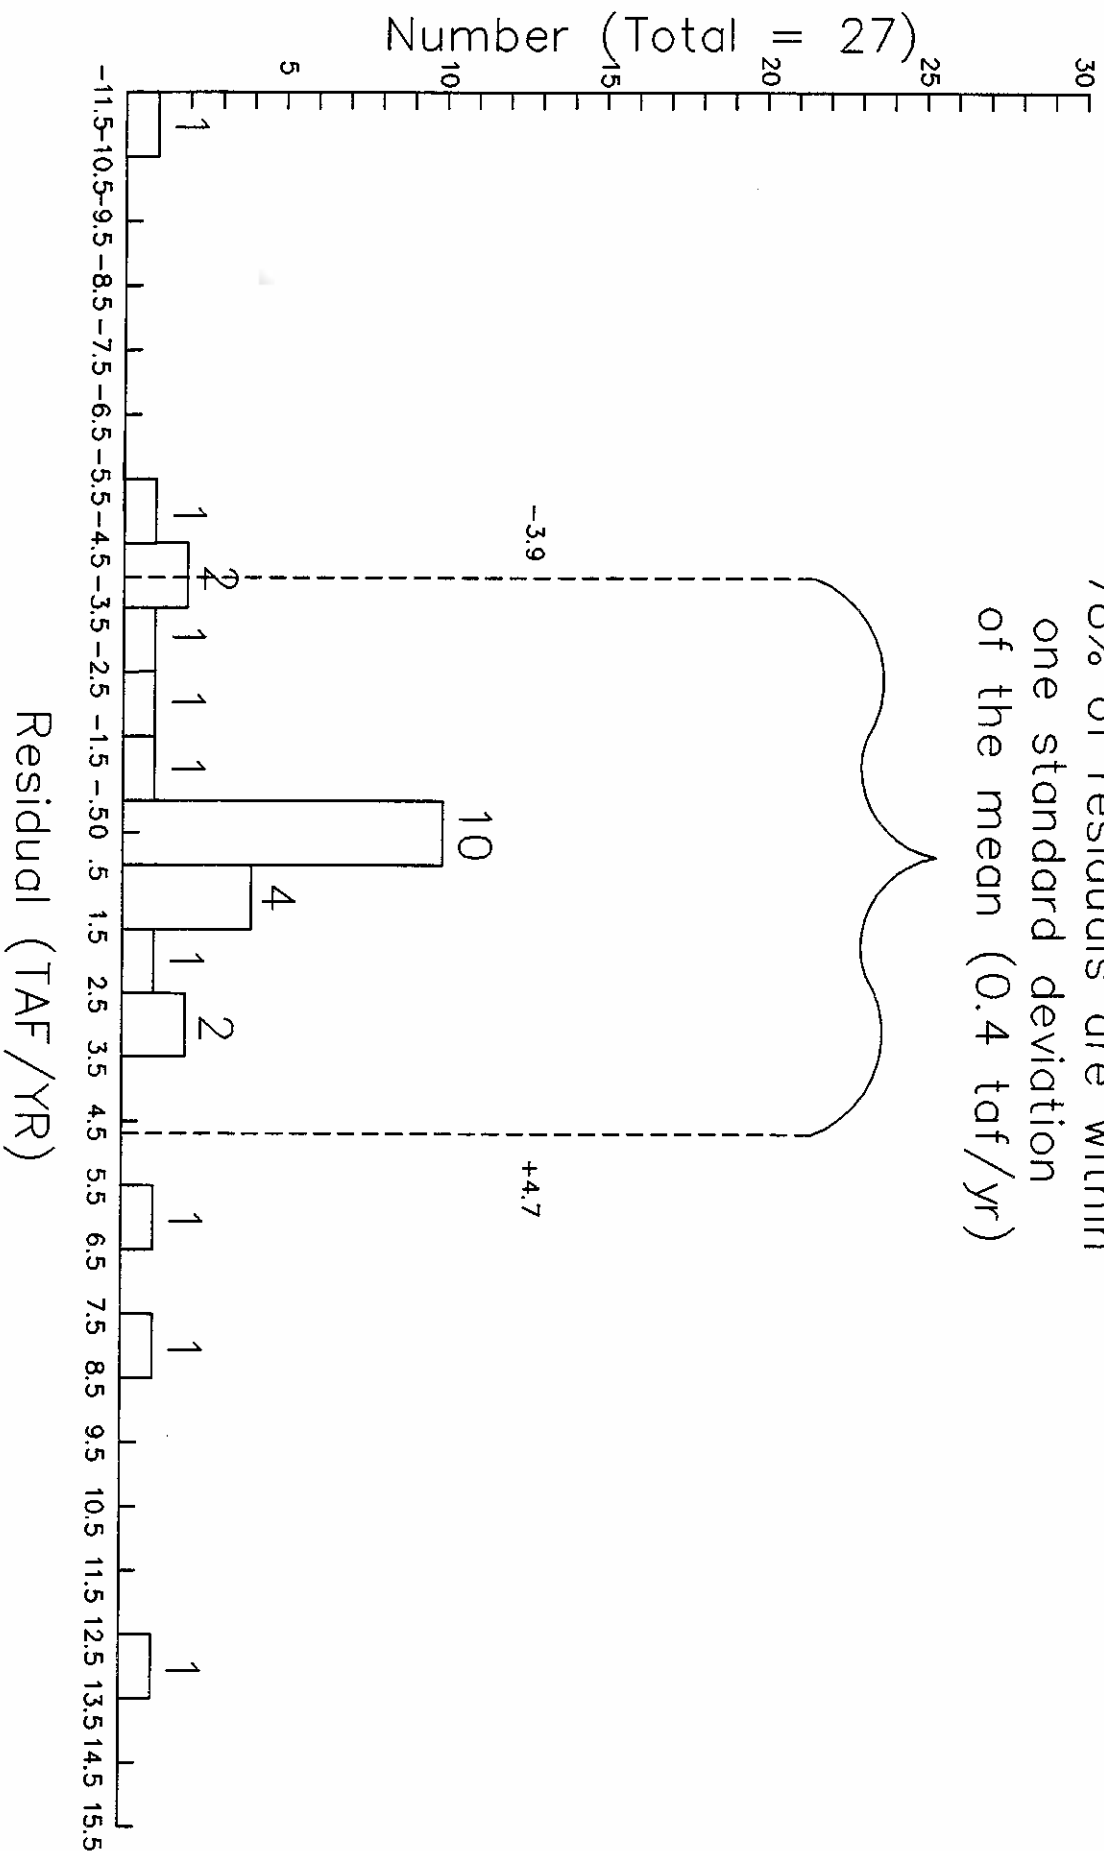

Based on these conclusions, other authors have dismissed the reliability of the Maxey-Eakin method. For example, Lerner and others (1990) cite Watson's study as an illustration of the low accuracy of simple precipitation-recharge relations. Lerner and others (1990) conclude that "the wide confidence intervals make the coefficients unusable for prediction, despite being derived

The results of the analysis were reported as the computed Maxey-Eakin coefficients and their corresponding 95-percent confidence intervals. Because the 95-percent confidence intervals for the five coefficients were relatively large, Watson and others (1976) concluded that the predictive capability of the Maxey-Eakin method is suspect.

The regression was computed using 63 observations that were collected by screening the Reconnaissance Reports according to a set of criteria similar to that used in this report.

where

Y = water-budget discharge (dependent variable),

P_i = volume of precipitation within each Hardman zone (independent variable), and

a_i = the Maxey-Eakin coefficient for each Hardman zone (regression coefficient).

$$Y = \sum_{i=1}^5 a_i P_i \quad (15)$$

A previous evaluation of the Maxey-Eakin method was performed by Watson and others (1976), with the objective of examining the statistical validity of the method. In that analysis, a multiple-linear regression was performed to compute the five Maxey-Eakin coefficients based on data from the Reconnaissance Reports. The regression was of the form

5.2.1 Study by Watson and Others (1976)

5.2 COMPARISON TO PREVIOUS WORK

from a large, carefully assembled database." Burbey and Prudic (1991) also reference the Watson study, noting the conclusion that "the method could not reliably predict recharge other than provide an approximation."

However, it may not be appropriate to draw conclusions about the overall reliability of the Maxey-Eakin method based on the individual confidence intervals for each coefficient. What is most important is the overall predictive reliability of the Maxey-Eakin method as compared against independent estimates of recharge. This predictive reliability is only indirectly related to the standard error of the individual Maxey-Eakin coefficients. Rather, the predictive reliability is measured by the standard error of prediction of the regression, which is nearly equivalent to the standard deviation of the residuals that was discussed in the analysis of uncertainty in Section 5.1. Therefore, this report argues that the overall predictive reliability of the Maxey-Eakin method can best be evaluated by the type of uncertainty analysis presented here.

In addition to the difference in analytical approach, the current study is distinguished from Watson and others (1976) by an expanded and improved data base. In order to separate the effects of the two differences, the technique used by Watson and others (1976) was applied to the current data set. A multiple-linear regression of the form used by Watson and others (1976) was performed using the group of 40 water-budget estimates identified in this study. The results of this regression are compared to the results obtained by Watson and others (1976) in Table 5. Table 5 shows that, for three of the five precipitation zones, the approximate 95-percent confidence intervals computed in this analysis are smaller than those by Watson. This indicates less variability in those Maxey-Eakin coefficients, which suggests that the data base of 40 observations used in this analysis is somewhat better than the data base used by Watson and others (1976). Despite these improvements, however, it appears that the final conclusion reached by Watson and others (1976) would not have changed if the current data base had been available. This is because both analyses generally indicate high variability of the Maxey-Eakin coefficients as computed by regression.

Another evaluation of an empirical relationship for determining recharge from precipitation was conducted by Bredekenkamp (1990). The results of Bredekenkamp's investigation parallel the conclusion of this study that an empirical relationship for calculating recharge provides reasonably good estimates of recharge.

5.2.2 Study by Bredekenkamp (1990)

The approach used in the current analysis suggests that the Maxey-Eakin method provides estimates of recharge that are generally in good agreement with independent estimates. This conclusion contradicts that of Watson and others (1976) because the two analyses have used different statistical indicators as a measure of predictive reliability. The methods used in this report are more appropriate to evaluate the total uncertainty in the Maxey-Eakin method. The predictive reliability of the Maxey-Eakin method should not be judged by the standard error of the individual coefficients as computed by regression.

1 63 observations.
 2 40 observations.
 3 95% confidence intervals were estimated as equal to two standard deviations.

| Precipitation Zone (in.) | Maxey-Eakin Coefficients (%) | | | 95% Confidence Intervals (%) |
|--------------------------|------------------------------|----------------------------|---------------|------------------------------|
| | Watson (1976) | This Analysis ² | Watson (1976) | |
| > 20 | 24 | 20.3 | ±15 | ±10.4 |
| 15-20 | 19 | 20.4 | ±16 | ±10.0 |
| 12-15 | -1 | -3.5 | ±6 | ±5.5 |
| 8-12 | 4 | 6.7 | ±2 | ±2.5 |
| > 8 | 0 | 1.1 | ±1 | ±1.4 |
| | | | | This Analysis ³ |

TABLE 5
RESULTS OF MULTIPLE-LINEAR REGRESSIONS

The results of the previous analysis of uncertainty can be used to evaluate the uncertainty in the Maxey-Eakin estimates for the 20 basins in which the District has applied for the appropriation of ground water (Figure 1). In order to produce results that are conservative, the group of 40 budget estimates is selected as a basis for the analysis because this group displays somewhat greater uncertainty than the group of 27 model estimates. Consequently, the analysis in this

6.0 EVALUATION OF UNCERTAINTY IN ESTIMATES FOR 20 BASINS

This relationship was determined by regression using the rainfall estimates as the independent variables and the "reconstructed" recharge estimates as the dependent variables. As Bredenkamp notes, "The high correlation coefficient ($r = 0.989$) reflects excellent agreement between the reconstructed and reference recharge values."

$$R = 0.30 (R - 313) \quad (17)$$

However, the relation that best fit the data was provided by:

The results of the analysis showed good general agreement between the two groups of estimates. The independent estimates used by Bredenkamp, referred to as "reconstructed estimates," were derived primarily from water balances, ground-water flow models, and chemical mass balances.

where

$$R = \text{annual recharge (in mm), and}$$

$$P = \text{annual precipitation (in mm).}$$

$$R = 0.35 (P - 360) \quad (16)$$

The study by Bredenkamp (1990) focussed on the dolomite region in South Africa. Bredenkamp identified independent estimates of recharge for 14 basins to compare with recharge estimates determined from this empirical relationship:

$$\text{Var}[e_{ME20}] = 20 \text{Var}[e_{ME}] \quad (21)$$

But, if it assumed that the errors for each of the 20 basins are distributed the same as for the group of 40, then

$$\text{Var}[e_{ME20}] = \text{Var}\left[\sum_{i=1}^{20} e_i\right] \quad (20)$$

Taking the variance of the above relation produces

$$e_{ME20} = \sum_{i=1}^{20} e_i \quad (19)$$

20 basins as follows:

In turn, the total error e_{ME20} can be expressed as the sum of the individual errors in each of the

where ME'_{20} = the true value for the total Maxey-Eakin recharge to the 20 basins, and e_{ME20} = the error in the total Maxey-Eakin estimate of recharge for the 20 basins.

$$ME_{20} = ME'_{20} + e_{ME20} \quad (18)$$

this quantity can be separated into two components: Maxey-Eakin recharge estimates have been computed for all of the 20 basins of interest and are given in the Reconnaissance Reports. The cumulative Maxey-Eakin recharge can be designated as ME_{20} , and is equal to the sum of these 20 estimates. Proceeding as in the earlier analysis,

for the 40 basins. section assumes that the residuals for the 20 basins have the same distribution as the residuals

- The Maxey-Eakin method provides fairly reliable estimates of recharge to ground-water basins in Nevada,

of this report are:

Based on the findings from this current analysis of the Maxey-Eakin method, the conclusions

7.0 CONCLUSIONS

with the number of basins used.

predictive reliability of a total Maxey-Eakin recharge estimate for a group of basins increases proportional to the square root of the number of basins included in the analysis. Therefore, the more basins are included in the computation. In the general case, the decrease in c_p is inversely demonstrated that the coefficient of variation for the sum of a number of basins decreases as the individual basins within the group of 40, which was 44 percent. Mathematically, it can be greater than 0.10, or 10 percent. This value for c_p can be compared to the value computed for from the 20 basins, which is 224,000 acre-ft/yr. The result is a coefficient of variation no dividing the maximum standard deviation of 21,500 acre-ft/yr by the total Maxey-Eakin recharge The coefficient of variation c_p (Equation 14) of the total recharge estimate can be computed by

Maxey-Eakin recharge estimate for the 20 valleys is no greater than 21,500 acre-ft/yr. 22 produces $\sigma[e_{ME20}] \leq 21,500$ acre-ft/yr. This means that the standard deviation of the total estimate for an individual basin, $\sigma[e_{MB}]$, equal to 4,800 acre-ft/yr. Using this value in Equation The previous analysis established an upper bound for the standard deviation of the Maxey-Eakin

$$\sigma[e_{ME20}] = \sqrt{20} \sigma[e_{MB}] \quad (22)$$

gives

Square-rooting both sides of Equation 21 to obtain an expression in terms of standard deviations

- Using a group of 40 independent estimates of recharge obtained from water budgets, an analysis of the uncertainty in the method indicates that the standard deviation of a Maxey-Eakin estimate for a given ground-water basin is not more than 4,800 acre-ft/yr, with a maximum coefficient of variation of 44 percent,
- Using a group of 27 independent estimates of recharge obtained from models, the uncertainty analysis indicates that the standard deviation of a Maxey-Eakin estimate for a given ground-water basin is not more than 4,300 acre-ft/yr, with a maximum coefficient of variation of 25 percent,
- Applying the results of the uncertainty analysis from the 40 water-budget estimates to the total Maxey-Eakin recharge estimate from 20 selected basins indicates that the standard deviation of this estimate is not more than 21,500 acre-ft/yr, with a maximum coefficient of variation of 10 percent, and
- In the general case, the predictive reliability of a Maxey-Eakin recharge estimate for a group of basins, as measured by the coefficient of variation, is expected to increase with the number of basins evaluated.

8.0 REFERENCES

8.1 STATE OF NEVADA REPORT SERIES

(Report Series arranged alphabetically on basis of series abbreviation)

R. -- RECONNAISSANCE SERIES REPORTS

- R1 Newark Valley: T.E. Fakin, 1960.
R2 Pine Valley: T.E. Fakin, 1961.
R3 Long Valley [White Pine County]: T.E. Fakin, 1961.
R4 Pine Forest Valley: W.C. Sinclair, 1962.
R5 Imlay area: T.E. Fakin, 1962.
R6 Diamond Valley: T.E. Fakin, 1962.
R7 Desert Valley: W.C. Sinclair, 1962.
R8 Independence Valley: T.E. Fakin, 1962.
R9 Gabbs Valley: T.E. Fakin, 1962.
R10 Sarcobatus Flat and Oasis Valley: G.T. Malmberg and T.E. Fakin, 1962.
R11 Hualapai Flat: W.C. Sinclair, 1962.
R12 Ralston and Stonecabin Valleys: T.E. Fakin, 1962.
R13 Cave Valley: T.E. Fakin, 1962.
R14 Amargosa Desert: G.E. Walker and T.E. Fakin, 1963.
R15 Long Valley--Massacre Lake region: T.E. Fakin, 1963.
R16 Dry Lake and Delamar Valleys: T.E. Fakin, 1963.
R17 Duck Lake Valley: W.C. Sinclair, 1963.
R18 Garden and Coal Valleys: T.E. Fakin, 1963.
R19 Antelope and Middle Reese River Valleys: E.G. Crosthwaite, 1963.
R20 Black Rock Desert area: W.C. Sinclair, 1963.
R21 Pahranagat and Pahroc Valleys: T.E. Fakin, 1963.
R22 Pueblo Valley--Continental Lake region: W.C. Sinclair, 1963.
R23 Dixie-Fairview Valley area: Phillip Cohen and D.E. Everett, 1963.
R24 Lake Valley: F.E. Rush and T.E. Fakin, 1963.
R25 Coyote Spring and Kane Spring Valleys and Muddy River Springs area: T.E. Fakin, 1964.
R26 Edwards Creek Valley: D.E. Everett, 1964.
R27 Meadow Valley area: F.E. Rush, 1964.
R28 Smith Creek and Ione Valleys: D.E. Everett and F.E. Rush, 1964.
R29 Grass Valley (Pershing County): Phillip Cohen, 1964.
R30 Monitor, Antelope, and Kobeh Valleys: F.E. Rush and D.E. Everett, 1964.
R31 Upper Reese Valley: T.E. Fakin, D.O. Moore, and D.E. Everett, 1965.

- R32 Lovelock Valley: D.E. Everett and F.E. Rush, 1965.
R33 Spring Valley: F.E. Rush and S.A. T. Kazmi, 1965.
R34 Snake Valley area: J.W. Hood and F.E. Rush, 1965.
R35 Huntington Valley area: F.E. Rush and D.E. Everett, 1965.
R36 Eldorado-Piute Valley area: F.E. Rush and C.J. Huxel, Jr., 1966.
R37 Grass and Carico Lake Valleys: D.E. Everett and F.E. Rush, 1966.
R38 Little Fish Lake, Hot Creek, and Little Smoky Valleys: F.E. Rush and D.E. Everett, 1966.
R39 Eagle Valley: G.F. Worts, Jr., and G.T. Malmberg, 1966.
R40 Walker Lake area: D.E. Everett and F.E. Rush, 1967.
R41 Washoe Valley: F.E. Rush, 1967.
R42 Steploe Valley: T.E. Eakin and J.L. Hughes, 1967.
R43 Warm Springs-Lemmon Valley area: F.E. Rush and P.A. Giancy, 1967.
R44 Smoke Creek and San Emidio Deserts: P.A. Giancy and F.E. Rush, 1968.
R45 Clayton Valley-Stonewall Flat area: F.E. Rush, 1968.
R46 Mesquite-Ivanpah Valley area: P.A. Giancy, 1968.
R47 Thousand Springs Valley: F.E. Rush, 1968.
R48 Snake River Basin: D.O. Moore and T.E. Eakin, 1968.
R49 Butte Valley: P.A. Giancy, 1968.
R50 Lower Moapa-Lake Mead area: F.E. Rush, 1968.
R51 Virgin River Valley: P.A. Giancy, 1968.
R52 Columbus Salt Marsh-Soda Spring Valley area: A.S. Van Denburgh, and P.A. Giancy, 1970.
R53 Antelope Valley and East Walker area, Nevada: P.A. Giancy, 1971.
R54 Nevada Test Site area: F.E. Rush, 1970.
R55 Granite Springs Valley area: J.R. Hartill, 1970.
R56 Pilot Creek Valley area: J.R. Hartill, 1971.
R57 Truckee River basin: A.S. Van Denburgh, R.D. Lamke, and J.L. Hughes, 1972.
R58 Fish Lake Valley: F.E. Rush and T.L. Katzer, 1973.
R59 Carson River basin: P.A. Giancy and T.L. Katzer, 1975.
R60 Railroad and Renoyer Valleys: A.S. Van Denburgh and F.E. Rush, 1974.
- B -- **WATER-RESOURCES BULLETINS**
- B3 Water Levels and Artesian Pressure In Wells In Las Vegas Valley In Other Valleys In Nevada, 1913-1945: Robinson, T.W., G.B. Maxey, J.C. Fredericks, and C.H. Jameson, 1947.
B5 Geology and Water Resources of Las Vegas, Pahump, and Indian Spring Valleys, Clark and Nye Counties, Nevada: Maxey, G.B. and C.H. Jameson, 1948.
B6 Ground Water in Las Vegas, Pahump, and Indian Spring Valleys, Nevada. A Summary: Maxey, G.B. and T.W. Robinson, 1947.
B8 Ground Water In White River Valley, White Pine, Nye, and Lincoln Counties, Nevada: Maxey, G.B. and T.E. Eakin, 1949.

- B10 Ground Water In Paradise Valley, Humboldt County, Nevada: Loeltz, O.J., D.A. Phoenix, and T.W. Robinson, 1949.
- B11 Preliminary Report on Ground Water in Fish Lake Valley, Nevada and California: Eakin, T.E., 1950.
- B12 Contributions to the Hydrology of Eastern Nevada: Eakin, T.E., G.B. Maxey, T.W. Robinson, J.C. Fredericks, and O.J. Loeltz, 1951.
- B13 Geology and Ground-Water Resources of Buena Vista Valley, Pershing County, Nevada: Loeltz, O.J. and D.A. Phoenix, 1955.
- B18 A Summary of the Hydrology of the Las Vegas Ground-Water Basin, Nevada, With Special Reference to the Available Supply: Malmberg, G.T., 1961.
- B19 Preliminary Results of Hydrogeochemical Studies in the Humboldt River Valley Near Winnemucca, Nevada: Cohen, P., 1962.
- B22 Preliminary Results of Hydrogeologic Investigations in the Valley of the Humboldt River Near Winnemucca, Nevada: Cohen, Philip, 1963.
- B24 An Evaluation of the Water Resources of the Humboldt River Valley Near Winnemucca, Nevada: Cohen, Philip, 1963.
- B27 Water in the Humboldt River Valley Near Winnemucca, Nevada: Cohen, Philip, 1964.
- B29 Ground Water in Las Vegas Valley: Domenico, P.A., D.A. Stephenson, and G.B. Maxey, 1964.
- B32 Hydrologic Reconnaissance of the Humboldt River Basin, Nevada: Eakin, T.E., and R.D. Lamke, 1966.
- B33 A Regional Interbasin Ground-Water System in the White River Area, Southeastern Nevada: Eakin, T.E., 1966.
- B34 Effects of Irrigation Development on the Water Supply of Quinn River Valley Area, Nevada and Oregon, 1950-64: Huxel, C.J., Jr., 1966.
- B35 Hydrologic Response to Irrigation Pumping in Diamond Valley, Eureka, and Elko Counties, Nevada, 1950-65: Harrill, J.R. and R.D. Lamke, 1968.
- B37 Hydrologic Response to Irrigation Pumping in Hualapai Flat, Washoe, Pershing, and Humboldt Counties, Nevada, 1960-67: Harrill, J.R. and P.L. Soule, 1969.
- B38 Water Resources and Development in Mason Valley, Lyon and Mineral Counties, Nevada, 1948-65: Huxel, C.J., Jr., and E.E. Harris, 1969.
- B39 Effects of Ground-Water Development on the Water Regimen of Paradise Valley, Humboldt County, Nevada, 1948-68, and Hydrologic Reconnaissance of the Tributary Areas: Harrill, J.R. and D.O. Moore, 1970.
- B41 Water Resources of Big Smoky Valley, Lander, Nye, and Esmeralda Counties, Nevada: Rush, F.E. and C.V. Schroer, 1971.
- B42 Evaluation of the Water Resources of Lemmon Valley, Washoe County, Nevada, With Emphasis on Effects of Ground-Water Development to 1971: Harrill, James R., 1973.
- B43 Geohydrology of Smith Valley, Nevada, With Special Reference to the Water-Use Period, 1953-72: Rush, F.E. and C.V. Schroer, 1976.
- B44 Pumping and Depletion of Ground-Water Storage in Las Vegas Valley, Nevada, 1955-74: Harrill, James R., 1976.

8.2 OTHER PUBLICATIONS

- Anderson, T. W., 1985, "Geohydrology of the southwest alluvial basins, Arizona," in Anderson, T. W., and Johnson, A. Ivan, eds, Regional Aquifer Systems of the United States: southwest alluvial basins of Arizona, A WRA monograph series No. 7, 99-111.
- Artaga, F. E., and Durbin, T. J., 1978, Development of a relation for steady-state pumping rate for Eagle Valley ground-water basin, Nevada, U.S. Geological Survey Open-File Report 79-261, 44 pp.
- Artaga, F. E., 1982, Mathematical model analysis of the Eagle Valley ground-water basin, west-central Nevada, U.S. Geological Survey Open-File Report 80-1224, 55 pp.
- Artaga, F. E., and Nichols, W. D., 1984, Hydrology of Washoe Valley, Washoe County, Nevada, U.S. Geological Survey Open-File Report 84-465, 29 pp.
- Bedinger, M. S., Sargent, K. A., and Langer, W. H., 1990, Studies of geology and hydrology in the Basin and Range Province, southwestern United States, for isolation of high-level radioactive waste--characterization of the Bonneville Region, Utah and Nevada, U.S. Geological Survey PP 1370-G, 38 pp.
- Benjamin, J. R., and Cornell, C. A., 1970, Probability, statistics, and decision for civil engineers, McGraw-Hill Book Co., 684 pp.
- Bredenkamp, D. B., 1990, "Quantitative estimation of groundwater recharge by means of a simple rainfall-recharge relationship," in Lerner, D. N., Issar, A. S., and Simmers, I., eds, Groundwater recharge: A guide to understanding and estimating natural recharge, International Contributions to Hydrology, vol. 8, Verlag Heinz Heise GmbH & Co., pp. 247-256.
- Bunch, Robin L., 1992, Bibliography of selected water-resources publications on Nevada by the U.S. Geological Survey, 1885 through 1991, U.S. Geological Survey Open-File Report 92-42, 43 pp.
- Burby, T. J., and Prudic, D. E., 1991, Conceptual evaluation of regional ground-water flow in the carbonate-rock province of the Great Basin, Nevada, Utah, and adjacent states, U.S. Geological Survey PP 1409-D, 84 pp.
- Campana, M. E., and Mahin, D. A., 1985, "Model-derived estimates of ground-water mean ages, recharge rates, effective porosities and storage in a limestone aquifer," *Journal of Hydrology*, vol. 76, pp. 247-264.
- Dettinger, M. D., and VanDenburg, A. S., 1988, U.S. Geological Survey ground-water studies in Nevada, U.S. Geological Survey Open-File Report 88-119, 2 pp.

Dettinger, Michael D., 1989, Distribution of carbonate-rock aquifers in southern Nevada and the potential for their development, Summary of Findings, 1985-88, U.S. Geological Survey, Summary Report No. 1, 37 pp.

Dettinger, M.D., 1989, "Reconnaissance estimates of natural recharge to desert basins in Nevada, U.S.A., by using chloride-balance calculations," *Journal of Hydrology*, vol. 106, pp. 55-78.

Eakin, T.E., 1966, "A regional interbasin groundwater system in the White River area, southeastern Nevada," *Water Resources Research*, vol. 2, pp. 251-271.

Eakin, T.E., Price, D., and Harrill, J.R., 1976, Summary appraisals of the nation's ground-water resources--Great Basin Region, U.S. Geological Survey, pp 813-G, 37 pp.

Freeze, R.A., and Cherry, J.A., 1979, *Groundwater*, Prentice-Hall, Inc., pp. 66-67.

Handman, E.H., 1988, Ground-Water resources of Honey Lake Valley, Nevada and California, U.S. Geological Survey Open-File Report 88-306, 2 pp.

Handman, E.H., Londquist, C.J., and Maurer, D.K., 1990, Ground-water resources of Honey Lake Valley, Lassen County, California, and Washoe County, Nevada, U.S. Geological Survey WRIIR 90-4050, 128 pp.

Hardman, G., 1936, Nevada precipitation and acreages of land by rainfall zones, University of Nevada Experimental Station, Reno, Nevada.

Harrill, J.R., 1986, Ground-water storage depletion in Pahump Valley, Nevada-California, 1962-75, U.S. Geological Survey WSP No. 2279, 53 pp.

Harrill, J.R., Welch, A.H., Prudic, D.E., Thomas, J.M., Carman, R.L., Plume, R.W., Gates, J.S., and Mason, J.L., 1983, Aquifer systems in the Great Basin Region of Nevada, Utah, and adjacent states--a study plan: U.S. Geological Survey Open-File Report 82-445, 49 pp.

Harrill, J.R., Gates, J.S., and Thomas, J.M., 1988, Major ground-water flow systems in the Great Basin Region of Nevada, Utah, and adjacent states: U.S. Geological Survey Hydrologic Investigations Atlas HA-694C, 2 sheets.

Hess, John W., and Mifflin, Martin D., 1978, "A feasibility study of water production from deep carbonate aquifers in Nevada," Water Resources Center, Publication No. 41054.

Katzer, Terry, Durbin, T.J., and Maurer, D.K., 1984, Water-resources appraisal of the Galena Creek Basin, Washoe County, Nevada, U.S. Geological Survey Open-File Report 84-433, 59 pp.

- Kilroy, K.C., 1991, Ground-water conditions in Amargosa Desert, Nevada-California, 1952-1987, U.S. Geological Survey WRIIR 89-4101, 93 pp.
- Kirk, Stephen T., and Campana, Michael E., 1988, "Simulation of groundwater flow in a regional carbonate-alluvial system with sparse data: The White River flow system, southeastern Nevada," Water Resources Center, Publication No. 41115.
- Kirk, S.T., and Campana, M.E., 1990, "A deuterium-calibrated groundwater flow model of a regional carbonate-alluvial system," *Journal of Hydrology*, vol. 119, pp. 357-388.
- Lerner, D.N., Issar, A.S., and Simmers, I., eds., 1990, Groundwater recharge: A guide to understanding and estimating natural recharge, International Contributions to Hydrology, vol. 8, Verlag Heinz Heise GmbH & Co., 345 pp.
- Loeitz, O.J. and Eakin, T.E., 1953, Geology and water resources of Smith Valley, Lyon and Douglas Counties, Nevada, U.S. Geological Survey WSP No. 1228, 89 pp.
- Lyles, B.F., Jacobson, R.L., and Hess, J.W., 1987, "Reconnaissance of groundwater quality in southern Nevada," Water Resources Center, Publication No. 41101.
- Lyles, B.F., and Hess, J.W., 1988, "Isotope and ion geochemistry in the vicinity of the Las Vegas Valley shear zone," Water Resources Center, Publication No. 41111.
- Malmberg, Glenn T., 1965, Available water supply of the Las Vegas Ground-Water Basin, Nevada, U.S. Geological Survey WSP No. 1780, 116 pp.
- Malmberg, Glenn T., 1967, Hydrology of the valley-fill and carbonate-rock reservoirs, Pahump Valley, Nevada-California, U.S. Geological Survey WSP No. 1832, 47 pp.
- Maurer, D.K., 1988, Recharge to the Eagle Valley ground-water basin by streamflow in Vicee Canyon, West-Central Nevada, U.S. Geological Survey WRIIR 88-4158, 66 pp.
- Mittin, Martin D., 1968, "Delineation of ground-water flow systems in Nevada," Water Resources Center, Publication No. 42004.
- Mittin, M.D., and Hess, J.W., 1979, "Regional carbonate flow systems in Nevada," *Journal of Hydrology*, vol. 43, pp. 217-237.
- National Atlas Sectional Maps, File No. 00450, Central Pacific States, U.S. Geological Survey Maps, National Atlas Sheet 32-33.
- Plume, R.W., and Carlton, S.C., 1988, Hydrogeology of the Great Basin Region of Nevada, Utah, and adjacent states: U.S. Geological Survey Hydrologic Investigations Atlas HA-694-A, 1 sheet.

- Plume, R. W., 1989, Ground-water conditions in Las Vegas Valley, Clark County, Nevada, Part 1, Hydrogeologic Framework, U.S. Geological Survey WSP NO. 2320-A, 15 pp.
- Pupacko, Alex, Wood, D. B., and Williams, R. P., 1989, Geohydrologic data for selected springs in eastern Nevada through 1982, with emphasis on White Pine County, U.S. Geological Survey Open-File Report 88-712, 45 pp.
- Ripple, C. D., Rubin, J., and van Hylckama, T. E. A., 1972, Estimating steady-state evaporation rates from bare soils under conditions of high water table: U.S. Geological Survey WSP 2019-A, 39 pp.
- Schaefer, D. H., 1991, Documentation of model input and output values for simulation of regional ground-water flow; carbonate-rock province, Nevada, Utah, and adjacent states. U.S. Geological Survey Open-File Report 91-479, 4 pp.
- Scott, B. R., Smales, T. J., Rush, F. E., and Van Denburgh, A. S., 1971, Nevada's Water Resources: Nevada Division of Water Resources, Water for Nevada Report 3, 87 pp.
- Simmers, I., ed., 1988, Estimation of natural groundwater recharge, NATO ASI Series C: Mathematical and Physical Sciences, vol. 222, D. Reidel Publishing Co., 510 pp.
- State Engineer's Office, 1976, Guide to Nevada State Water Planning Reports: Nevada Division of Water Resources, Water For Nevada Series, 94 pp.
- Sun, Ren Jen, and Weeks, J. B., 1991, Bibliography of regional aquifer-system analysis program of the U.S. Geological Survey, 1978-91, U.S. Geological Survey Water-Resources Investigations Report 91-4122, 92 pp.
- Sun, R. J., and Weeks, J. B., 1991, Bibliography of regional aquifer-system analysis program of the U.S. Geological Survey, 1978-91, U.S. Geological Survey WRI No. 91-4122, 92 pp.
- Thomas, J. M., and Mason, J. L., 1986, Ground-water levels in the Great Basin Region of Nevada, Utah, and adjacent states: U.S. Geological Survey Hydrologic Investigations Atlas HA-694-B, 2 sheets.
- Thomas, J. M., Carlton, S. M., and Hines, L. B., 1989, Ground-water hydrology and simulated effects of development in Smith Creek Valley, a hydrologically closed basin in Lander County, Nevada, U.S. Geological Survey PP 1409-E, 57 pp.
- U.S. Geological Survey, 1991, Errata for U.S. Geological Survey Hydrologic Investigations Atlas 694-C, Water Resources Division, Carson City, Nevada, 2 pp.

Watson, Phil, Sinclair, Peter, and Waggoner, Ray, 1976, "Quantitative evaluation of a method for estimating recharge to the desert basins of Nevada," Journal of Hydrology, vol. 31, pp. 335-357.

Wilson, L.G., DeCook, K.J., and Neuman, S.P., 1980, Regional recharge research for Southwest Alluvial Basins, University of Arizona, Water Resources Research Center Reports, 389 pp.

Zones, C.P., 1961, Ground-water reconnaissance of Winnemucca Lake Valley, Pershing and Washoe Counties, Nevada, U.S. Geological Survey WSP 1539-C, 18 pp.

Zones, C.P., 1961, Ground-water potentialities in the Crescent Valley, Eureka and Lander Counties, Nevada, U.S. Geological Survey WSP 1581, 50 pp.

APPENDIX A

NOTES:

- (1) KEY TO REFERENCES:
 R = RECONNAISSANCE REPORT, NEVADA DEPARTMENT OF CONSERVATION AND RESOURCES
 B = WATER-RESOURCES BULLETIN, NEVADA DEPARTMENT OF CONSERVATION AND RESOURCES
 P = U.S. GEOLOGICAL SURVEY PROFESSIONAL PAPER
 W = U.S. GEOLOGICAL SURVEY WATER-SUPPLY PAPER
 MR = U.S. GEOLOGICAL SURVEY WATER-RESOURCES INVESTIGATIONS REPORT
 OF = U.S. GEOLOGICAL SURVEY OPEN-FILE REPORT
 JH = JOURNAL OF HYDROLOGY

- (2) HYDROGRAPHIC BASIN NUMBERS AFTER HARRILL AND OTHERS (1988)
 (3) SEE REPORT TEXT FOR REASONS FOR REJECTING MAXEY-EAKIN RECHARGE ESTIMATE
 (4) SEE REPORT TEXT FOR REASONS FOR REJECTING WATER-BUDGET ESTIMATE OF DISCHARGE

| REF. (1) | HYDRO-GRAPHIC BASIN NO. (2) | RECHARGE REJECTION REASON (3) | WATER-BUDGET ESTIMATE OF DISCHARGE | | | | MODEL ESTIMATE OF RECHARGE (AF/YR) | SOURCE |
|----------|-----------------------------|-------------------------------|------------------------------------|-------------------------|----------------------|--------------------------|------------------------------------|--------|
| | | | REPORTED RECHARGE (AF/YR) | TOTAL DISCHARGE (AF/YR) | OTHER INFLOW (AF/YR) | DISCH. REJEC. REASON (4) | | |
| B33 | 16 | WHITE R FLOW SYSTEM | 104000 | 103000 | 0 | 0 | 9000 Dettlinger (1989), JH 106 | |
| R17 | 18 | DUCK LAKE | 9000 | 7000 | 0 | 0 | | |
| R44 | 20 | PAINTERS FLAT | 1300 | 1200 | 0 | 0 | | |
| R44 | 21 | SAND | 10 | 30 | 0 | 0 | | |
| R44 | 22 | SMOKE CREEK DESERT | 13000 | 19000 | 380 | 0 | | |
| R11, B37 | 24 | SAN EMIDIO DESERT | 2100 | 3200 | 0 | 0 | | |
| R4 | 29 | HUALAPAI FLAT | 7000 | 6700 | 0 | 0 | | |
| R2, B32 | 53 | PINE FOREST | 10000 | 14100 | 0 | 0 | | |
| R37 | 55 | PINE | 45500 | 24000 | 0 | 0 | | |
| R31, B32 | 56 | CARICO LAKE | 4300 | 4500 | 0 | 0 | | |
| R29, B32 | 71 | UPPER REESE RIVER | 37000 | 37000 | 0 | 0 | | |
| R43 | 84 | GRASS (HUMBOLDT) | 12000 | 16800 | 0 | 0 | | |
| R43 | 85 | WARM SPRINGS | 6000 | 2000 | 0 | 0 | | |
| R43 | 86 | SPANISH SPRINGS | 600 | 1000 | 0 | 0 | | |
| B42 | 92 | SUN | 50 | 25 | 0 | 0 | | |
| B42 | 92 | E LEMMON SUBAREA | 500 | 620 | 0 | 0 | | |
| B42 | 92 | SILVER LAKE SUBAREA | 1000 | 760 | 0 | 0 | | |

APPENDIX A: WORKSHEET FOR SCREENING RECHARGE ESTIMATES
PAGE 2

| REF. (1) | HYDRO-GRAPHIC BASIN NO. (2) | VALLEY | RECHARGE REJECTION REASON (3) | REPORTED MAX-E RECHARGE (AF/YR) | TOTAL DISCHARGE (AF/YR) | OTHER INFLOW (AF/YR) | DISCH REJEC. REASON (4) | MODEL ESTIMATE OF RECHARGE (AF/YR) | SOURCE |
|------------------------------------|-----------------------------|-------------------|-------------------------------|---------------------------------|-------------------------|----------------------|-------------------------|------------------------------------|--------------------------------|
| R43 | 92 | LEMMON DRY | 0 | 1800 | 1200 | 300 | 0 | 1800 | Dettinger (1989), JH 106 |
| R43 | 95 | DRY | 0 | 2400 | 2300 | 0 | 0 | 2400 | |
| R43 | 96 | NEWCOMB LAKE | 0 | 300 | 130 | 0 | 0 | 300 | |
| R43 | 97 | HONEY LAKE (EAST) | 0 | 1500 | 11000 | 500 | 0 | 1500 | |
| R39 | 104 | EAGLE (CAR&VIR) | 3 | 8700 | 14800 | 0 | 0 | 8700 | |
| R52 | 111 | ALKALI (N) | 0 | 400 | 300 | 0 | 0 | 400 | |
| R52 | 113 | HUNTOON | 0 | 800 | 300 | 0 | 0 | 800 | |
| R52 | 114 | TEELS | 0 | 1300 | 1400 | 0 | 0 | 1300 | |
| R58 | 117 | FISH LAKE | 0 | 33000 | 27000 | 0 | 0 | 33000 | 27000 Dettinger (1989), JH 106 |
| R52 | 118 | COLUMBUS | 0 | 700 | 4000 | 200 | 0 | 700 | |
| R52 | 119 | RHODES | 0 | 500 | 1000 | 400 | 0 | 500 | |
| R52 | 121 | SODA SPRING E | 0 | 600 | 900 | 200 | 0 | 600 | |
| R52 | 121 | SODA SPRING W | 0 | 100 | 30 | 300 | 0 | 100 | |
| R23 | 124 | FAIRVIEW | 5 | 500 | 500 | 0 | 0 | 500 | |
| R23 | 128 | DIXIE | 0 | 6000 | 16200 | 7000 | 0 | 6000 | |
| R23 | 130 | PLEASANT | 5 | 3000 | 3000 | 0 | 0 | 3000 | |
| R23 | 132 | JERSEY | 0 | 800 | 800 | 0 | 0 | 800 | |
| R26 | 133 | EDWARDS CREEK | 0 | 8000 | 7600 | 0 | 0 | 8000 | |
| R28, P1409E | 134 | SMITH CREEK | 0 | 9600 | 7000 | 0 | 0 | 9600 | 8300 P1409E |
| R28 | 135 | IONE | 3 | 8000 | 4000 | 0 | 0 | 8000 | |
| R52 | 136 | MONTE CRISTO | 0 | 500 | 400 | 0 | 0 | 500 | |
| R37 | 138 | GRASS (LANDER) | 0 | 13000 | 13000 | 0 | 0 | 13000 | |
| R30 | 140 | MONITOR (S) | 1 | 15000 | 11200 | 0 | 0 | 15000 | |
| R30 | 140 | MONITOR (N) | 1 | 6300 | 8000 | 2000 | 0 | 6300 | |
| R45 | 145 | STONEWALL | 5 | 100 | 200 | 0 | 0 | 100 | |
| R54 | 146 | SARCOBATUS FLAT | 3 | 1200 | 3500 | 1200 | 0 | 1200 | |
| R38 | 150 | LITTLE FISH LAKE | 0 | 11000 | 10000 | 0 | 0 | 11000 | |
| R30 | 151 | ANTELOPE | 1 | 4100 | 4200 | 0 | 0 | 4100 | |
| R6, B35 | 153 | DIAMOND total | 0 | 21000 | 30000 | 9000 | 0 | 21000 | |
| R38 | 156 | HOT CREEK | 0 | 7000 | 6300 | 200 | 0 | 7000 | |
| R60 | 170 | PENOVER | 0 | 4300 | 3800 | 0 | 0 | 4300 | 3200 Dettinger (1989), JH 106 |
| R49 | 178 | BUTTE (S) | 0 | 15000 | 12000 | 0 | 0 | 15000 | 12000 Dettinger (1989), JH 106 |
| R49 | 178 | BUTTE (N) | 0 | 3900 | 8700 | 0 | 0 | 3900 | |
| R42 | 179 | STEPTOE | 0 | 85000 | 70000 | 0 | 0 | 85000 | |
| WATER-BUDGET ESTIMATE OF DISCHARGE | | | | | | | | | |
| HYDRO- RECHARGE REPORTED | | | | | TOTAL | OTHER | DISCH | MODEL ESTIMATE OF | SOURCE |

APPENDIX A: WORKSHEET FOR SCREENING RECHARGE ESTIMATES
PAGE 3

| REF. (1) | GRAPHIC BASIN NO. (2) | VALLEY | REJECTION REASON (3) | MAXEY-E RECHARGE (AF/YR) | DISCHARGE (AF/YR) | INFLOW (AF/YR) | REJEC. REASON (4) | RECHARGE (AF/YR) | MODEL ESTIMATE OF RECHARGE (AF/YR) | SOURCE |
|------------------------------------|-----------------------------|---------------------|-------------------------------|---------------------------|-------------------------|----------------------|--------------------------|------------------|------------------------------------|--------------------------|
| R24 | 183 | LAKE | 0 | 13000 | 11500 | 0 | 0 | 0 | | |
| R33 | 184 | SPRING | 0 | 75000 | 74000 | 0 | 0 | 0 | | |
| JH106 | 103B | STAGECOACH | 6 | 400 | 400 | 0 | 0 | 0 | 62000 | Dettinger (1989), JH 106 |
| R23 | 125-127 | EASTGATE, COMKICK, | 0 | 6000 | 6000 | 0 | 0 | 0 | 400 | Dettinger (1989), JH 106 |
| R19, B32 | 57, 58 | ANTELOPE MIDDLE REE | 3 | 18000 | 18100 | 3500 | 0 | 0 | | |
| R27 | 205? | REMAINDER MEADOW | 0 | 8000 | | | 1 | 1 | | |
| R20 | 23 | GRANITE BASIN | 0 | 400 | | | 1 | 1 | | |
| R20 | 25 | HIGH ROCK LAKE | 0 | 13000 | | | 1 | 1 | | |
| R20 | 27 | SUMMIT LAKE | 0 | 4200 | | | 1 | 1 | | |
| R54 | 144 | LIDA | 4 | 500 | | | 1 | 1 | | |
| R54 | 145 | STONEMALL FLAT | 4 | 100 | | | 1 | 1 | | |
| R54 | 147 | GOLD FLAT | 4 | 3800 | | | 1 | 1 | | |
| R54 | 148 | CACTUS FLAT | 0 | 600 | | | 1 | 1 | | |
| R6, B35 | 153 | DIAMOND N SUBAREA | 0 | 9000 | | | 1 | 1 | 10500 | Dettinger (1989), JH 106 |
| R54 | 153 | DIAMOND S SUBAREA | 0 | 12000 | | | 1 | 1 | | |
| R54 | 157 | KAWICH | 0 | 3500 | | | 1 | 1 | | |
| R54 | 158 | GROOM LAKE | 0 | 3200 | | | 1 | 1 | | |
| R54 | 158 | PAPoose LAKE | 0 | 4 | | | 1 | 1 | | |
| R54 | 159 | YUCCA FLAT | 0 | 700 | | | 1 | 1 | | |
| R54 | 160 | FRENCHMAN FLAT | 0 | 100 | | | 1 | 1 | | |
| R54 | 161 | INDIAN SPRINGS | 0 | 10000 | | | 1 | 1 | | |
| R54 | 168 | THREE LAKES (N) | 0 | 2000 | | | 1 | 1 | | |
| R54 | 169 | TIKAPOO (N) | 0 | 2600 | | | 1 | 1 | | |
| R54 | 169 | TIKAPOO (S) | 0 | 3400 | | | 1 | 1 | | |
| R27 | 201 | PATTERSON | 0 | 10000 | | | 1 | 1 | | |
| R27 | 202 | THREE LAKES (S) | 0 | 6000 | | | 1 | 1 | | |
| R54 | 211 | LAS VEGAS W ONLY | 0 | 6000 | | | 1 | 1 | | |
| R54 | 212 | LAS VEGAS N ONLY | 0 | 4700 | | | 1 | 1 | | |
| JH106 | 212 | LAS VEGAS N ONLY | 6 | 28000 | | | 1 | 1 | 27600 | Dettinger (1989), JH 106 |
| R54 | 225 | MERCURY | 0 | 250 | | | 1 | 1 | | |
| R54 | 226 | ROCK | 5 | 30 | | | 1 | 1 | | |
| R54 | 227 | JACKASS FLATS E | 0 | 300 | | | 1 | 1 | | |
| R54 | 227 | JACKASS FLATS W | 0 | 580 | | | 1 | 1 | | |
| R54 | 227 | BUCKBOARD MESA | 0 | 1400 | | | 1 | 1 | | |
| WATER-BUDGET ESTIMATE OF DISCHARGE | | | | | | | | | | |
| REF. (1) | HYDRO-GRAPHIC BASIN NO. (2) | VALLEY | RECHARGE REJECTION REASON (3) | REPORTED RECHARGE (AF/YR) | TOTAL DISCHARGE (AF/YR) | OTHER INFLOW (AF/YR) | DISCH. REJEC. REASON (4) | RECHARGE (AF/YR) | MODEL ESTIMATE OF RECHARGE (AF/YR) | SOURCE |

| REF. (1) | HYDRO-GRAPHIC BASIN NO. (2) | VALLEY | RECHARGE REJECTION REASON (3) | REPORTED MAKEY-E RECHARGE (AF/YR) | TOTAL DISCHARGE (AF/YR) | OTHER INFLW (AF/YR) | DISCH REJEC. REASON (4) | MODEL OF RECHARGE ESTIMATE | SOURCE |
|------------------------------------|-----------------------------|--------------------------|-------------------------------|-----------------------------------|-------------------------|---------------------|-------------------------|-------------------------------------|--------|
| R54 | 228 | OASIS | 0 | 1000 | | | 1 | | |
| R54 | 229 | CRATER FLAT | 0 | 220 | | | 1 | | |
| R18, R33 | 171-172 | COAL/GARDEN | 5 | 12000 | | | 2 | 11000 Kirk & Campana (1990), JH 119 | |
| R52 | ? | MONO | 0 | 700 | | | 2 | | |
| R45 | ? | GRAPEVINE CYN | 5 | 50 | | | 2 | | |
| R52 | ? | ADOBE | 5 | 300 | | | 2 | | |
| R59 | ? | PACKARD | 0 | 710 | | | 2 | | |
| R52 | ? | QUEEN | 0 | 2000 | | | 2 | | |
| R45 | ? | ORIENTAL WASH | 5 | 300 | | | 2 | | |
| R22 | ? | PUEBLO | 0 | 2000 | | | 2 | | |
| R15 | 6 | GUANO (NV) | 0 | 7500 | | | 2 | | |
| R15 | 11 | COLEMAN (NV) | 0 | 1000 | | | 2 | | |
| R15 | 14 | SURPRISE (NV) | 0 | 1500 | | | 2 | | |
| R15 | 15 | BOULDER | 0 | 2000 | | | 2 | | |
| R44 | 17 | PILGRIM FLAT | 1 | 500 | | | 2 | | |
| R44 | 19 | DRY | 0 | 200 | | | 2 | | |
| R55 | 75 | BRADYS HOT SPRING | 0 | 160 | | | 2 | | |
| R57 | 76 | FERNLEY AREA | 0 | 600 | | | 2 | | |
| R55 | 77 | FIREBALL | 0 | 200 | | | 2 | | |
| R55 | 78 | GRANITE SPRINGS | 0 | 3500 | | | 2 | | |
| R55 | 79 | KUMIVA | 0 | 1000 | | | 2 | | |
| R57 | 88 | PLEASANT | 1 | 10000 | | | 2 | | |
| R41 | 89 | WASHOE (CARSON&VIRGINIA) | 4 | 14000 | | | 2 | 37000 Harrill (1986), W2279 | |
| R52 | 111 | ALKALI (S) | 0 | 1400 | | | 2 | | |
| R52 | 120 | GARFIELD | 0 | 300 | | | 2 | | |
| R45 | 141 | RALSTON | 0 | 5000 | | | 2 | | |
| R45 | 142 | ALKALI SPRING | 1 | 100 | | | 2 | | |
| R45 | 143 | CLAYTON | 0 | 1500 | | | 2 | | |
| R45 | 144 | LIDA | 0 | 500 | | | 2 | | |
| R45 | 149 | STONECABIN | 0 | 5000 | | | 2 | | |
| R30 | 152 | STEVENS BASIN | 1 | 200 | | | 2 | | |
| R38 | 155 | LIT. SMOKY (H) | 0 | 4000 | | | 2 | | |
| W2279 | 162 | PAHRUMP | 0 | 26000 | | | 2 | | |
| R46 | 163 | MESQUITE NV+CA | 5 | 1500 | | | 2 | | |
| WATER-BUDGET ESTIMATE OF DISCHARGE | | | | | | | | | |
| | | | | | TOTAL DISCHARGE (AF/YR) | | | | |
| | | | | | | OTHER INFLW (AF/YR) | | | |
| | | | | | | | DISCH REJEC. REASON (4) | | |
| | | | | | | | | MODEL OF RECHARGE ESTIMATE | |
| | | | | | | | | | SOURCE |
| R46 | 164 | IVANPAH (NV) | 0 | 700 | | | 2 | | |
| R46 | 164 | IVANPAH (CA) | 0 | 800 | | | 2 | | |

| REF. (1) | HYDRO- GRAPHIC BASIN NO. (2) | VALLEY | RECHARGE REJECTION REASON (3) | REPORTED MAK-E RECHARGE (AF/YR) | WATER-BUDGET ESTIMATE OF DISCHARGE | | | MODEL ESTIMATE OF RECHARGE (AF/YR) | SOURCE |
|-------------|---------------------------------------|---------------------|--|--|---------------------------------------|----------------------------|------------------------|--|--------|
| | | | | | TOTAL DISCHARGE (AF/YR) | OTHER INFLOW (AF/YR) | DISCH REJEC. (4) | | |
| R54 | 2 | PAHUTE MESA | 4 | 12000 | | | 3 | | |
| R22 | 3 | CONTINENTAL LAKE | 0 | 11000 | | | 3 | | |
| R22 | 3 | GRIDLEY LAKE | 0 | 4500 | | | 3 | | |
| R22 | 4 | VIRGIN | 0 | 7000 | | | 3 | | |
| R15 | 8 | MASSACRE LAKE | 0 | 3500 | | | 3 | | |
| R15 | 9 | LONG (NW NEV) | 0 | 6000 | | | 3 | | |
| R15 | 12 | MOSQUITO | 5 | 700 | | | 3 | | |
| R43 | 93 | ANTELOPE | 1 | 300 | | | 3 | | |
| R43 | 94 | BEDDELL FLAT | 0 | 1100 | | | 3 | | |
| WR90-4050 | 97 | HONEY LAKE model | 6 | 17000 | | | 3 | 22200 Handman & others (1990), WR90-4050 | |
| WR90-4050 | 97 | HONEY LAKE total | 6 | 95000 | | | 3 | 99000 Handman & others (1990), WR90-4050 | |
| R44 | 98 | SKEDADDLE CR | 0 | 600 | | | 3 | | |
| R43 | 99 | RED ROCK | 5 | 900 | | | 3 | | |
| R40 | 100 | COLD SPRINGS | 1 | 900 | | | 3 | | |
| R30 | 123 | RAMHIDE FLATS | 1 | 150 | | | 3 | | |
| R38 | 139 | KOBEH | 1 | 11000 | | | 3 | | |
| R60 | 155 | LIT. SMOKY (S) | 0 | 1400 | | | 3 | | |
| R47 | 173 | RAILROAD N | 0 | 46000 | | | 3 | | |
| R47 | 189 | TOANO-ROCK SPRING | 0 | 5000 | | | 3 | | |
| B44, W1780 | 189 | MONTELO-CRITTENDEN | 5 | 4000 | | | 3 | | |
| R14 | 212 | LAS VEGAS | 6 | 30000 | | | 3 | 30000 B44 | |
| R14 | 230 | AMARGOSA DESERT | 3 | 1500 | | | 3 | | |
| R56 | 191 | PILOT CREEK | 0 | 2400 | | | 4 | | |
| R47 | 189 | ROCKY BUTTE | 0 | 1300 | | | 5 | | |
| R47 | 189 | HERRELL SIDING-BRUS | 0 | 2000 | | | 5 | | |
| R50 | 215 | BLACK MTN. | 0 | 70 | | | 5 | | |
| R50 | 218 | CALIF. WASH | 0 | 60 | | | 5 | | |
| R50 | 220 | LOWER MOAPA | 0 | 40 | | | 5 | | |
| R59 | ? | WHITE PLAINS | 1 | 100 | | | 5 | | |
| R48 | 28 | BRUNEAU RIVER | 6 | 26000 | | | 6 | | |
| R48 | 34 | E LITTLE OMYHEE | 6 | 2700 | | | 6 | | |
| R48 | 35 | S FORK OMYHEE | 6 | 28000 | | | 6 | | |
| R48 | 37 | OMYHEE RIVER | 6 | 17000 | | | 6 | | |
| R48 | 39 | JARRIDGE RIVER | 6 | 32000 | | | 6 | | |

WATER-BUDGET ESTIMATE
OF DISCHARGE

APPENDIX A: WORKSHEET FOR SCREENING RECHARGE ESTIMATES
PAGE 7

| REF. (1) | HYDRO-GRAPHIC BASIN NO. (2) | VALLEY | RECHARGE REJECTION REASON (3) | REPORTED RECHARGE (AF/YR) | TOTAL DISCHARGE (AF/YR) | OTHER INFLOW (AF/YR) | DISCH. REJEC. REASON (4) | MODEL ESTIMATE OF RECHARGE (AF/YR) | SOURCE |
|----------|-----------------------------|---------------------|-------------------------------|------------------------------------|-------------------------|----------------------|--------------------------|------------------------------------|-----------------------------------|
| R48 | 40 | SALMON FALLS CR | 6 | 44000 | | | 6 | | |
| R48 | 41 | GOOSE CREEK | 6 | 6700 | | | 6 | | |
| R5 | 72 | IMLAY | 0 | 4000 | | | 6 | | |
| R32 | 73 | UPP/LOW LOVELOCK | 0 | 1200 | | | 6 | | |
| R32 | 73 | OREANA SUBAREA | 0 | 2000 | | | 6 | | |
| R57 | 81 | PYRAMID LAKE | 0 | 6600 | | | 6 | | |
| R57 | 82 | DODGE FLAT | 0 | 1400 | | | 6 | | |
| R57 | 83 | TRACY SEGMENT | 0 | 6000 | | | 6 | | |
| R57 | 87 | TRUCKEE MEADOWS | 1 | 27000 | | | 6 | | |
| R57 | 91 | TRUCKEE CYN NV&CA | 1 | 24000 | | | 6 | | |
| R57 | 91 | TRUCKEE CYN NV | 1 | 27000 | | | 6 | | |
| R59 | 101 | CARSON DESERT | 0 | 1300 | | | 6 | | |
| R59 | 103 | DAYTON | 3 | 7900 | | | 6 | | |
| R59 | 104 | CHURCHILL | 0 | 1300 | | | 6 | | |
| R59 | 105 | CARSON NV W OF CARS | 1 | 11000 | | | 6 | | |
| R59 | 105 | CARSON NV E OF CARS | 1 | 14000 | | | 6 | | |
| R59 | 105 | CARSON CA W FORK CA | 1 | 10600 | | | 6 | | |
| R59 | 105 | CARSON CA E FORK CA | 1 | 5400 | | | 6 | | |
| R53 | 106 | ANTELOPE | 1 | 18000 | | | 6 | | |
| B38 | 107 | MASON | 0 | 2000 | | | 6 | | |
| R53 | 109 | EAST WALKER AREA | 1 | 31000 | | | 6 | | |
| R7 | 31 | DESERT | 0 | 5000 | | | 7 | | |
| R9 | 122 | GABBS | 3 | 5200 | | | 8 | | |
| R1 | 154 | NEWARK | 0 | 17500 | | | 8 | | |
| R57 | 80 | MINNEUCCA LAKE | 0 | 2900 | | | 9 | | |
| R40 | 110 | SCHURZ SUBAREA | 0 | 500 | | | 9 | | |
| R40 | 110 | LAKE SUBAREA | 5 | 600 | | | 9 | | |
| R40 | 110 | LAKE SUBAREA | 5 | 600 | | | 9 | | |
| R17 | 14 | WHISKY FLAT | 0 | 5400 | | | 9 | | |
| R17 | 14 | SURPRISE (NV) | 4 | 500 | | | 10 | | |
| R57 | 84 | WARM SPRINGS | 4 | 6000 | | | 10 | | |
| R57 | 85 | SPANISH SPRINGS | 4 | 600 | | | 10 | | |
| R57 | 86 | SUN | 4 | 50 | | | 10 | | |
| R57 | 89 | WASHOE (TOTAL) | 4 | 15000 | | | 10 | | |
| | | | | WATER-BUDGET ESTIMATE OF DISCHARGE | | | | | |
| | | | | | | | | | MODEL ESTIMATE OF RECHARGE SOURCE |
| | | | | | | | | | 5200 Dettlinger (1989), JH 106 |

APPENDIX A: WORKSHEET FOR SCREENING RECHARGE ESTIMATES
 PAGE 8

| REF. (1) | BASIN NO. (2) | REASON (3) | RECHARGE (AF/YR) | (AF/YR) | (AF/YR) | REASON (4) | (AF/YR) |
|-------------|------------------|---------------|---------------------|---------|---------|---------------|---------|
| R12 | 141 | 4 | 16000 | | | 10 | |
| R10 | 146 | 4 | 1200 | | | 10 | |
| R12 | 149 | 4 | 16000 | | | 10 | |
| R10 | 228 | 4 | 250 | | | 10 | |
| R20 | 28 | 1 | NC | | | 11 | |
| R8 | 36 | 1 | NC | | | 11 | |
| R35 | 46 | 2 | NC | | | 11 | |
| R35 | 46 | 2 | NC | | | 11 | |
| R35 | 47 | 2 | NC | | | 11 | |
| R35 | 48 | 2 | NC | | | 11 | |
| B15, R32 | 54 | 1 | NC | | | 11 | |
| R43 | NA | 0 | 700 | | | 11 | |
| R47 | 190 | 0 | 700 | | | 12 | |