#10

WELL LOG AND REPORT TO THE STATE ENGINEER OF NEVADA

Log No. 379
Rec. 7-7 1948
Well No. —
Permit No.
Do not fill in

Owner The Nunn Company Driller Harry Wilson & Preston Bradshaw
Address Overton, Nevada Address Salt Lake City, Utah Lic. No. 43
Location of well: SE ¼ NE ¼ Sec. 3, T. 16 S, R 68 E, in Clark County
or

Water will be used for Washing Sand Total depth of well 75 ft
Size of drilled hole 12" Weight of casing per linear foot 37#
Thickness of casing ¼" Temp. of water Cool
Diameter and length of casing 12½" 60 ft & 15 ft 18 in Johnson Screen
(Casing 13" in diameter and under give inside diameter; casing 13" in diameter give outside diameter.)

If flowing well give flow in c.f.s. or g.p.m. and pressure
If nonflowing well give depth of standing water from surface 23 ft.
If flowing well describe control works
(Type and size of valve, etc.)

Date of commencement of well Jan 9 Date of completion of well Feb 8
Type of well rig 240 Star Cable tool

LOG OF FORMATIONS

From feet	To feet	Thickness feet	Type of material
0	15	15	Sandy Clay
15	42	27	Sand
42	46	4	Sand & pea gravel
46	52	6	Sand
52	73	21	Gravel - water
73	75	2	Clay & Gravel

Water-bearing Formation, Casing Perforations, Etc.

Chief aquifer (water-bearing formation)
from 52 to 73 ft.
Other aquifers

First water at 42 feet.

Casing perforated
from Johnson Screen to ft.

Size of perforations

(OVER)

LOG OF FORMATIONS—Continued

From feet	To feet	Thickness	Kind of material
			Drilled 20" hole to 75' then set 12" casing inside 20" hole with 15' of johnson screen inside 12" casing. Packed gravel in between 20" and 12" casing 2 ft. up 20" and 12" about 4 ft. Gravel packed in between 12" casing and hole. Plan surgeed with sand. Repeating pulsation-raising and bailing. Pipe 2 times bailing. Well was flat the 12" well up to 60' Plan with lead bottom 12" pipe and screen

CASING RECORD

Diam. casing	From feet	To feet	Length	"Remarks"—Seals, Grouting, Etc.
12½	0	75	75	62 ft. 20" Casing 60 ft. 12" Casing Lead Seal from 12" pipe to Johnson Screen Gravel

GENERAL INFORMATION—Pumping Test, Quality of Water, Etc.

The water is Fair. Water Cool

WELL DRILLERS STATEMENT

This well was drilled under my jurisdiction and the above information is true to my best information and belief.

Signed Harry Wilson
Well Driller

By Harry Wilson

License No. 43

Feb. 24, 1948

(Not to be filled in by Driller)

OFFICE STATE ENGINEER
FEB 27 1948

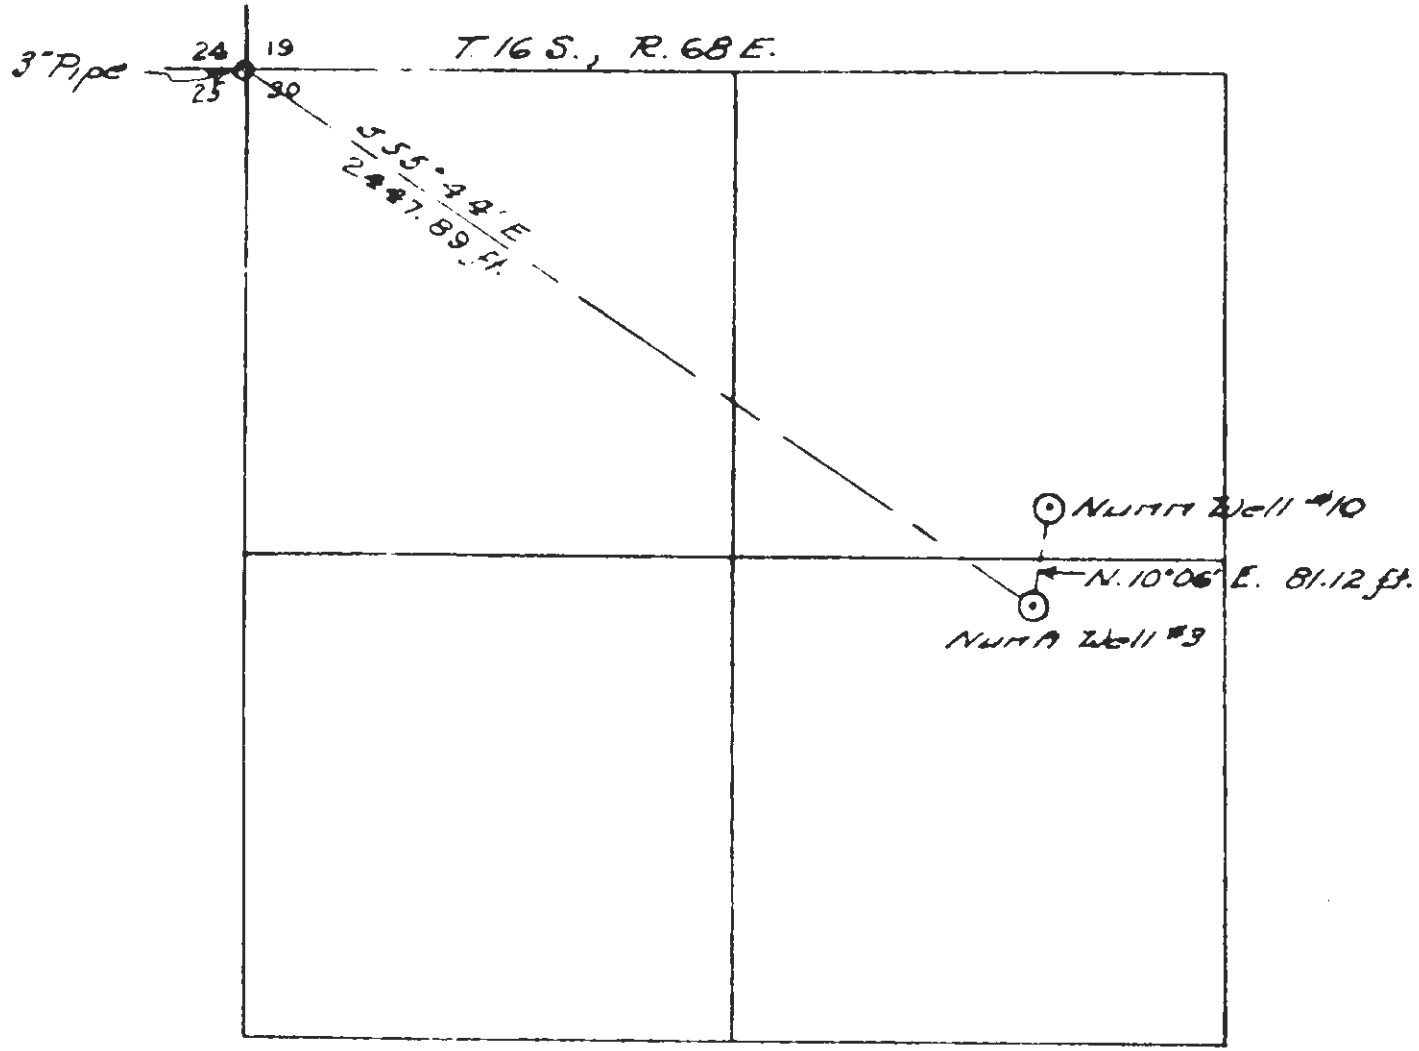
3" Pipe
24
19
25
30
T. 16 S., R. 68 E.
S 55° 44' E
2447.89 ft.
Numa Well #10
N. 10°06' E. 81.12 ft.
Numa Well #9